


Area	PA	NORTH AMERICA	LATIN AMERICA	EUROPE	IN without stand	IN with stand
Model Name	K-65XR31HM2	K-65XR30CM2	K-65XR30M2	K-65XR32M2/ K-65XR35M2/ K-65XR39M2	K-65XR36M2	-
SV No.	SV-44319	SV-44279	SV-44306	SV-44073	SV-44258	-
DIMENSION	TV only (W x H x D)	-	-	-	-	-
	TV only (W x H x D (D-Max))	Approx. 1447 x 841 x 70 mm	1447 x 841 x 70 mm / 57 x 33 1/8 x 2 3/4 inch	1447 x 841 x 70 mm	Approx. 144.7 x 84.1 x 7.0 cm	Approx. 1447 x 841 x 70 mm
	TV only with camera (W x H x D)	-	-	-	-	-
	TV with Stand (Standard position) (W x H x D)	-	-	-	-	-
	TV with Stand (Sound bar position) (W x H x D)	-	-	-	-	-
	TV with Stand (Outside) (W x H x D)	Approx. 1447 x 904 x 290 mm	1447 x 904 x 290 mm / 57 x 35 9/16 x 11 7/16 inch	1447 x 904 x 290 mm	Approx. 144.7 x 90.4 x 29.0 cm	-
	TV with Stand (Inside) (W x H x D)	-	-	-	Approx. 144.7 x 90.4 x 29.0 cm	-
	TV with Stand (Outside for Soundbar) (W x H x D)	-	-	-	-	-
	TV with Stand (Inside for Soundbar) (W x H x D)	-	-	-	-	-
	TV with Stand (Narrow position) (W x H x D)	-	-	-	-	-
	Stand Width (Standard position)	-	-	-	-	-
	Stand Width (Sound bar position)	-	-	-	-	-
	Stand Width (Outside)	Approx. 1255 mm	1255 mm / 49 7/16 inch	1255 mm	Approx. 125.5 cm	-
	Stand Width (Inside)	-	-	-	Approx. 62.8 cm	-
	Stand Width (Narrow position)	-	-	-	-	-
	Stand Inner Distance	-	-	-	-	-
	Stand Inner Distance (Inside position)	-	-	-	Approx. 61.0 cm	-
	Stand Inner Distance (Outside position)	Approx. 1237 mm	1237 mm / 48 11/16 inch	1237 mm	Approx. 123.7 cm	-
	Dimension of Stand (W x H x D)	Approx. 9 x 64 x 290 mm	9 x 64 x 290 mm / 3/8 x 2 1/2 x 11 7/16 inch	9 x 64 x 290 mm	Approx. 0.9 x 6.4 x 29.0 cm	-
	Dimension of Stand (Low) (W x H x D)	-	-	-	-	-
	Dimension of Stand (High) (W x H x D)	-	-	-	-	-
	VESA Hole Pitch	300 x 300 mm	300 x 300 mm / 11 13/16 x 11 13/16 inch	300 x 300 mm	30.0 x 30.0 cm	300 x 300 mm
WEIGHT	TV Only	Approx. 20.8 kg	20.8 kg / 45.9 lb	20.8 kg	Approx. 21.4 kg	Approx. 20.8 kg
	TV with Stand	Approx. 21.2 kg	21.2 kg / 46.8 lb	21.2 kg	Approx. 21.8 kg	-
Remarks						

ITEM	ECN NO.	POSITION	REVISION LIST		DATE	UPDATED BY	APPROVED BY
			DESCRIPTION	IS			
			WAS				

TV with Stand (Outside)




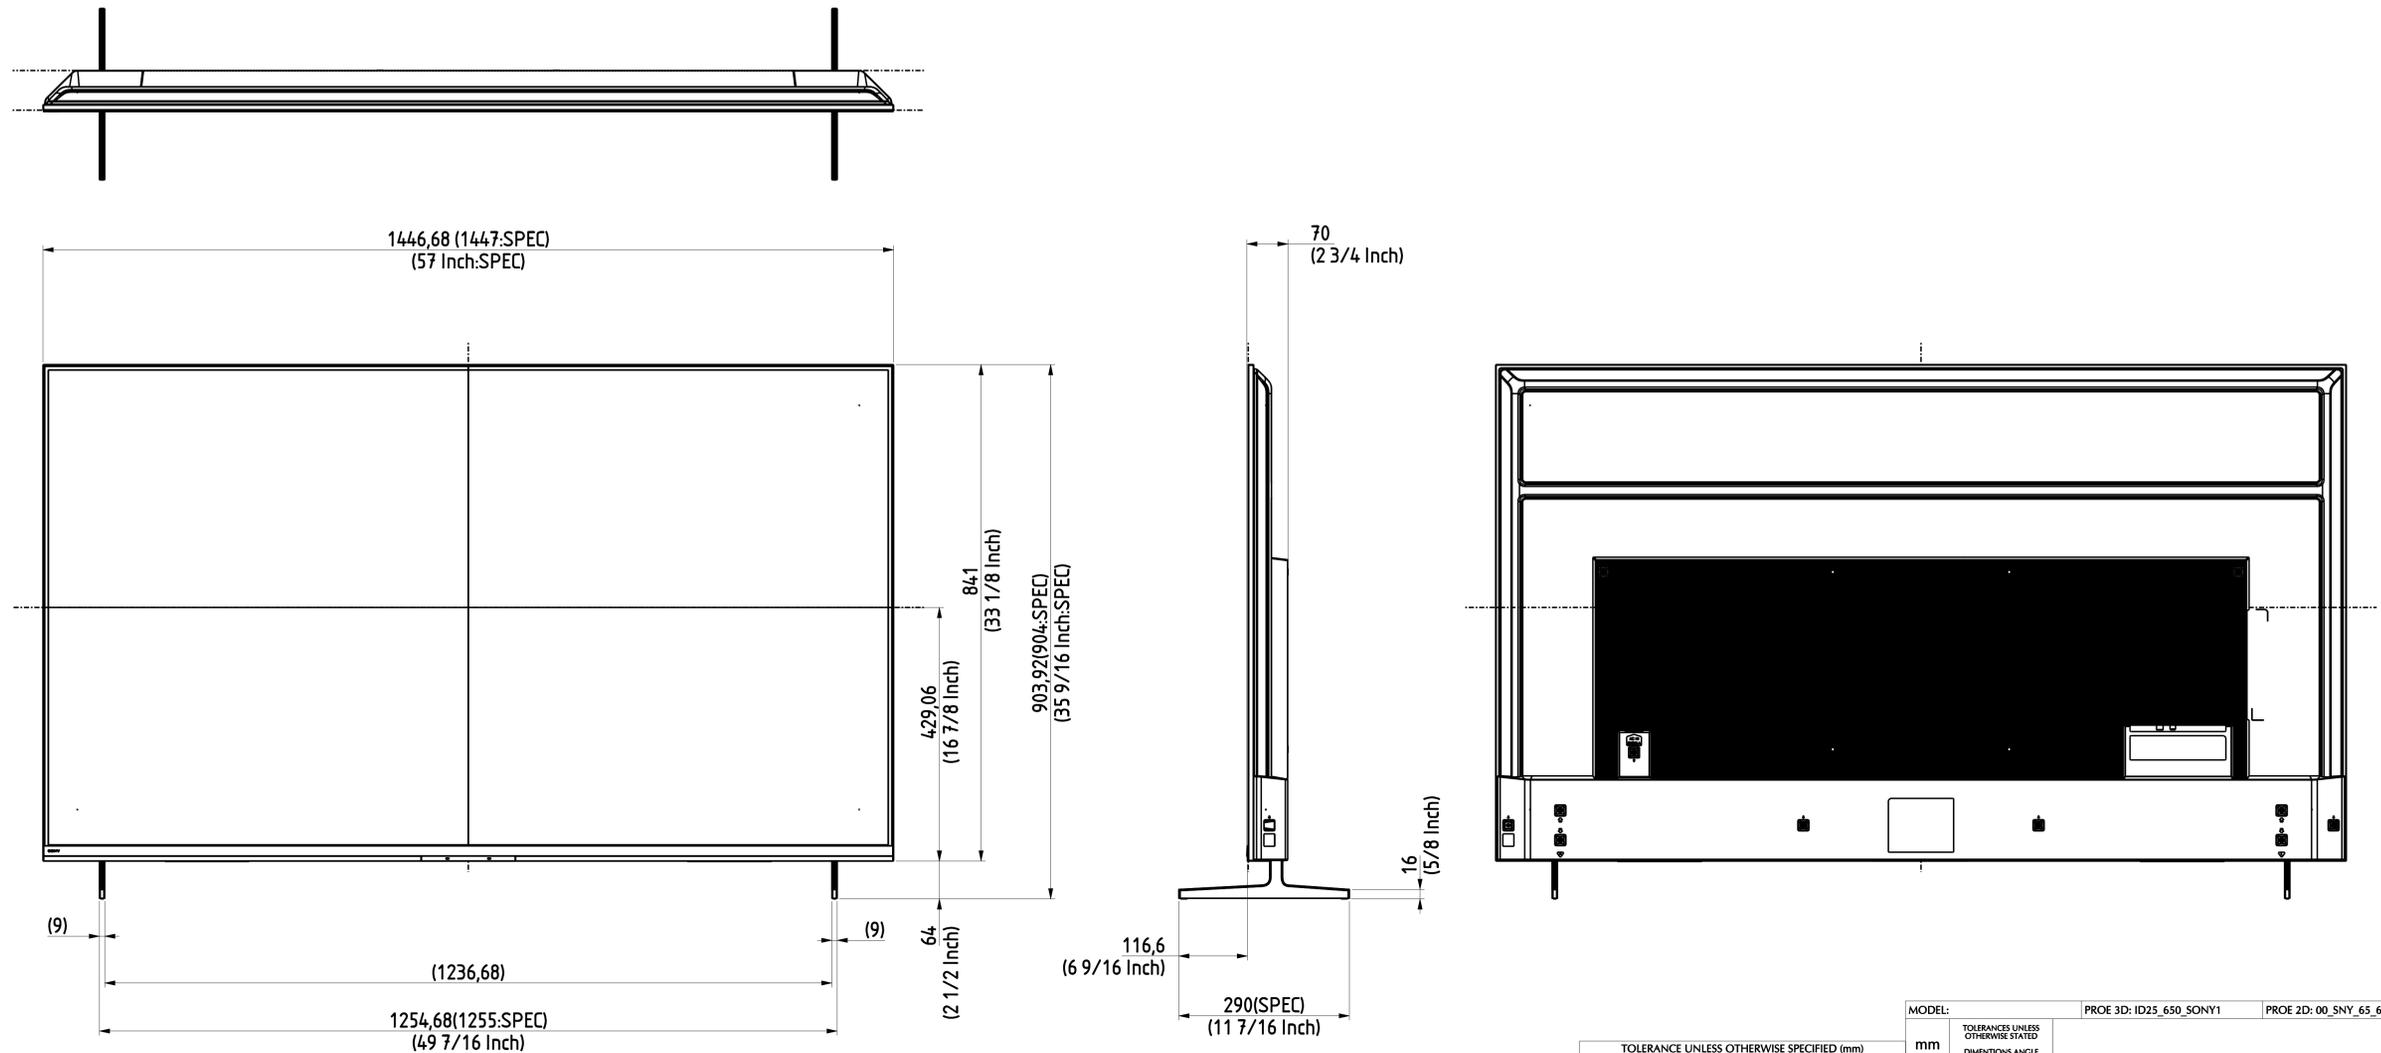


TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)			
RANGE OF DIM.	METAL & PLASTIC	POLYFOAM	CARTON
0 - 30	±0.10		
30 - 60	±0.15		
60 - 120	±0.20	+0/-2.0	
120 - 300	±0.25		+2.0/-0
300 - 600	±0.30		
600 - 1200	±0.40	+0/-3.0	
1200 - UPON	±0.50	+0/-4.0	
ANGLE (SHEET METAL) ± 0.5°			
Internal Diameter of Plastic Screw Boss ±0.05			

MODEL:	PROE 3D: ID25_650_SONY1	PROE 2D: 00_SNY_65_6V_250825
TOLERANCES UNLESS OTHERWISE STATED		
DIMENSIONS	3rd PROE	
ANGLE		
6V Drawing	65" One Piece	
Aug-25-25		
Technology Ltd.	TP	TV

ITEM	ECN NO.	POSITION	REVISION LIST		DATE	UPDATED BY	APPROVED BY
			DESCRIPTION WAS	DESCRIPTION IS			

TV with Stand (Outside)

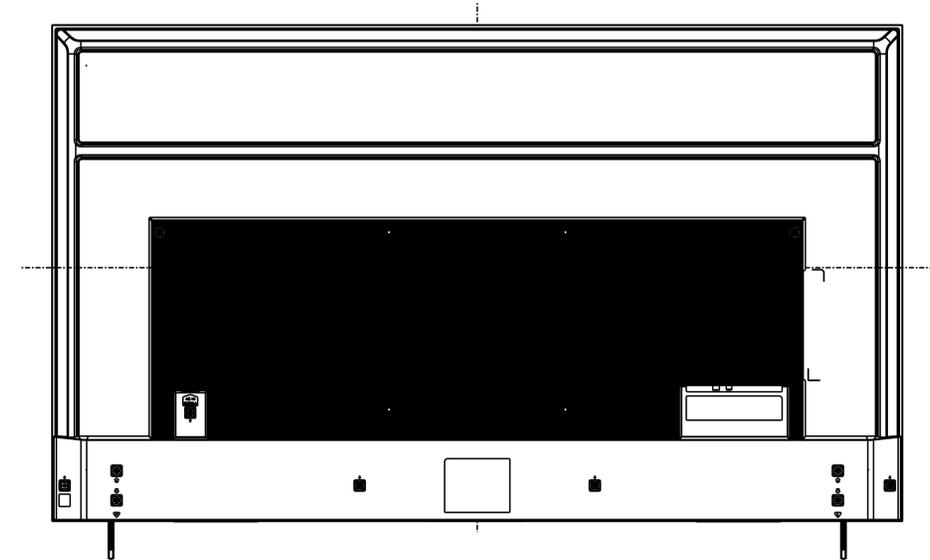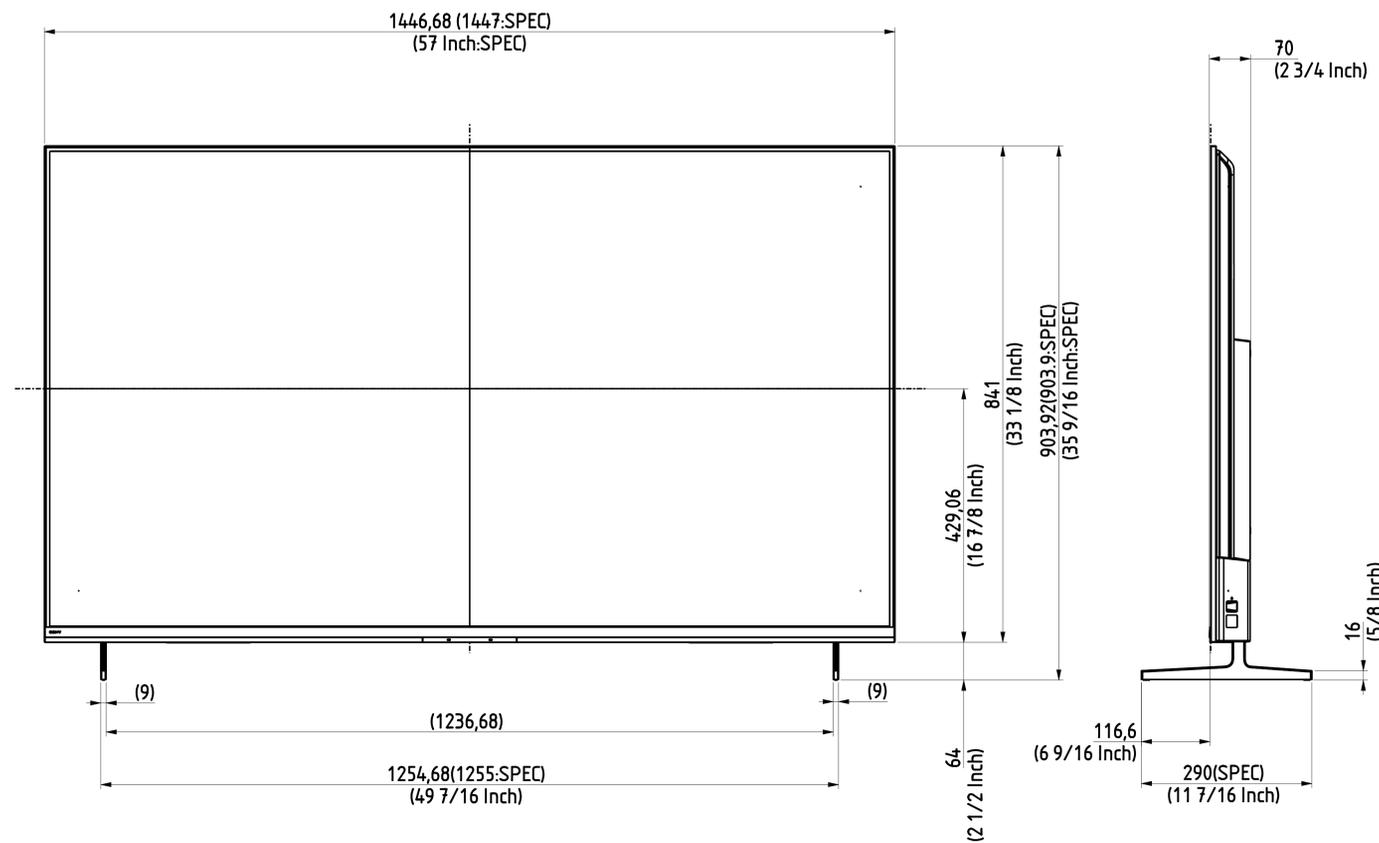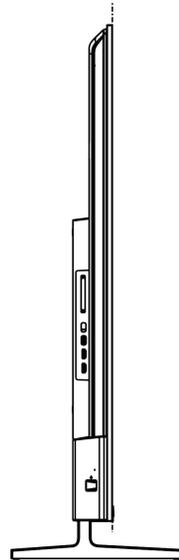
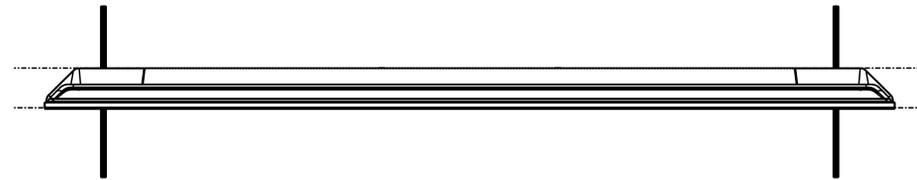


TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)			
RANGE OF DIM.	METAL & PLASTIC	POLYFOAM	CARTON
0-30	±0.10		
30-60	±0.15		
60-120	±0.20	+0/-2.0	
120-300	±0.25		+2.0/-0
300-600	±0.30		
600-1200	±0.40	+0/-3.0	
1200-UPON	±0.50	+0/-4.0	
ANGLE (SHEET METAL) ± 0.5°			
Internal Diameter of Plastic Screw Boss ±0.05			

MODEL:	PROE 3D: ID25_650_SONY1	PROE 2D: 00_SNY_65_6V_250825
mm	TOLERANCES UNLESS OTHERWISE STATED	
0,200	3rd PROJ.	
6V Drawing		65" One Piece
Aug-25-25		Technology Ltd.
TP		TV


REVISION LIST						
ITEM	ECN NO.	POSITION	DESCRIPTION WAS	IS	DATE	UPDATED BY / APPROVED BY

TV Only

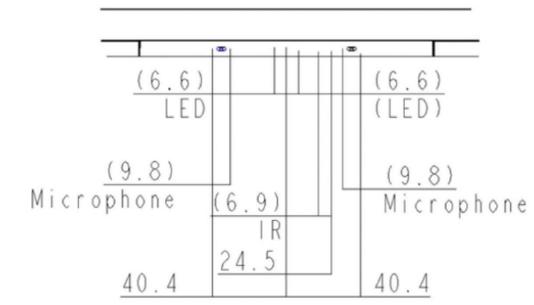


A
4.000

Detail A

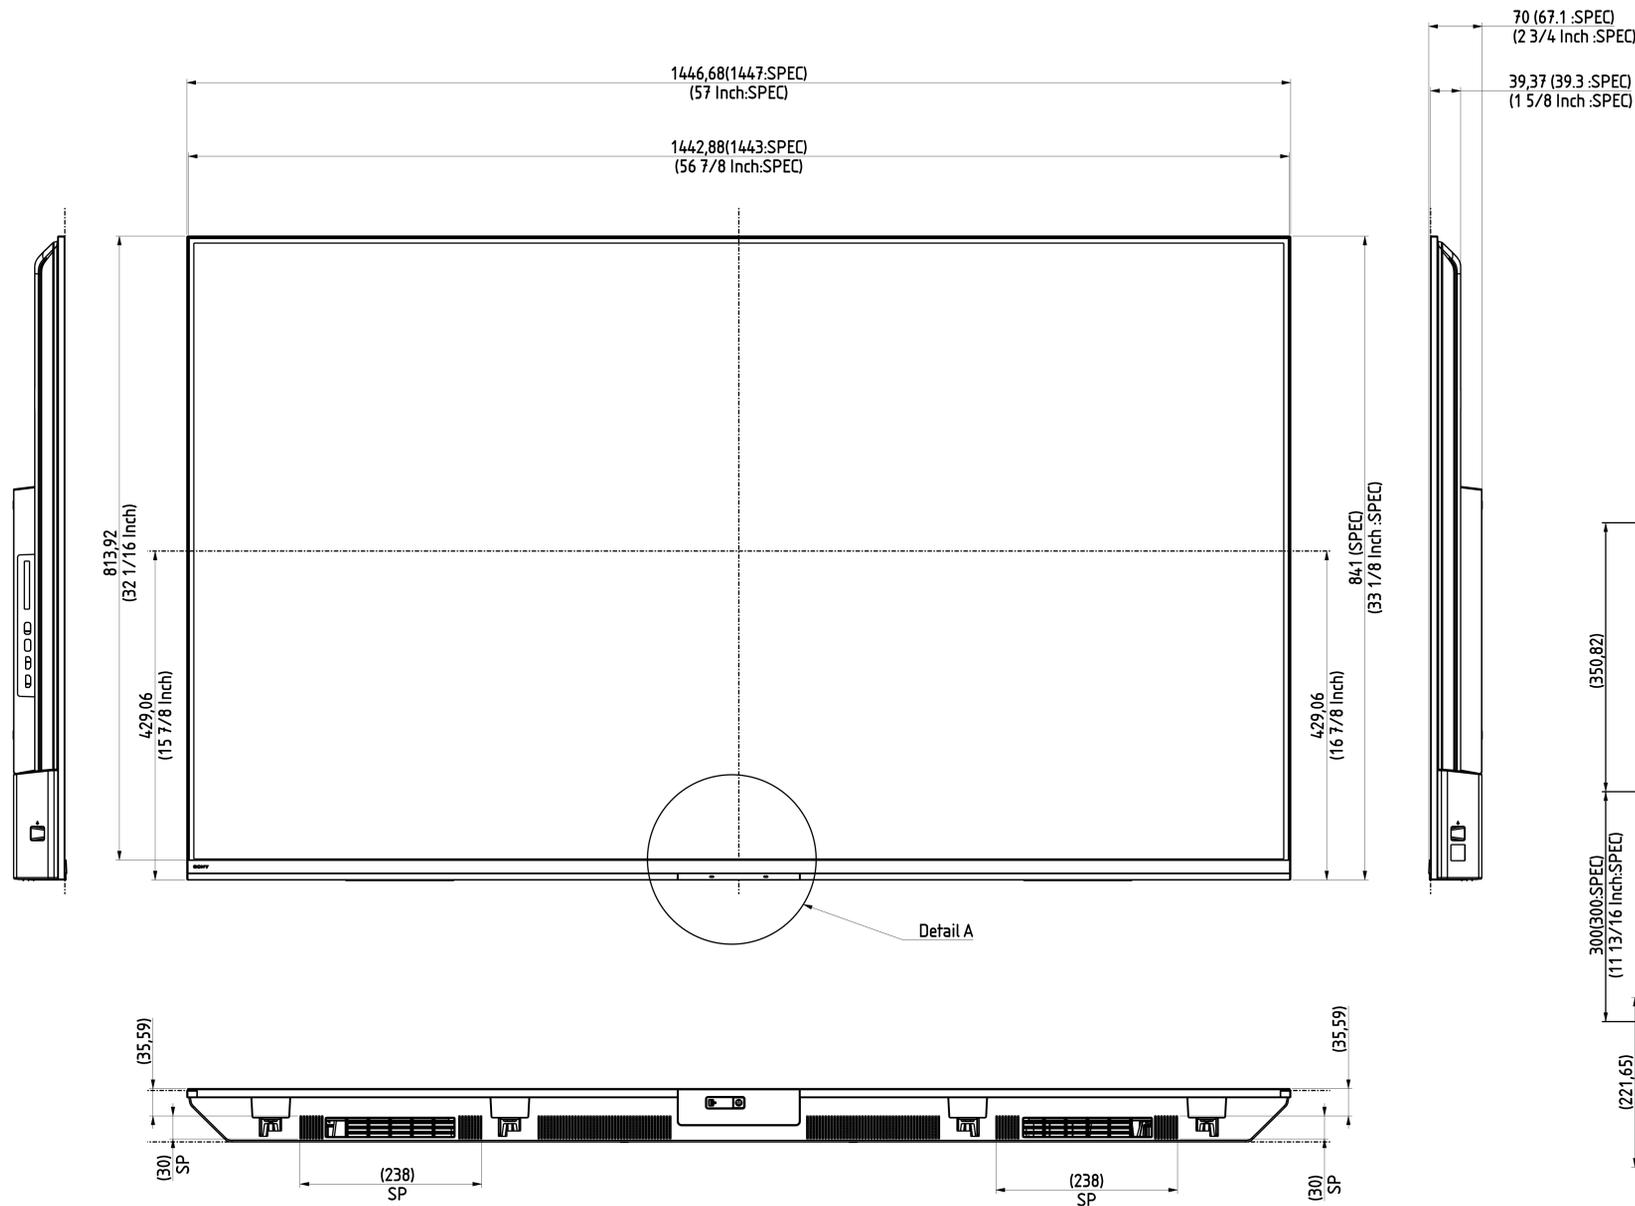

Detail A

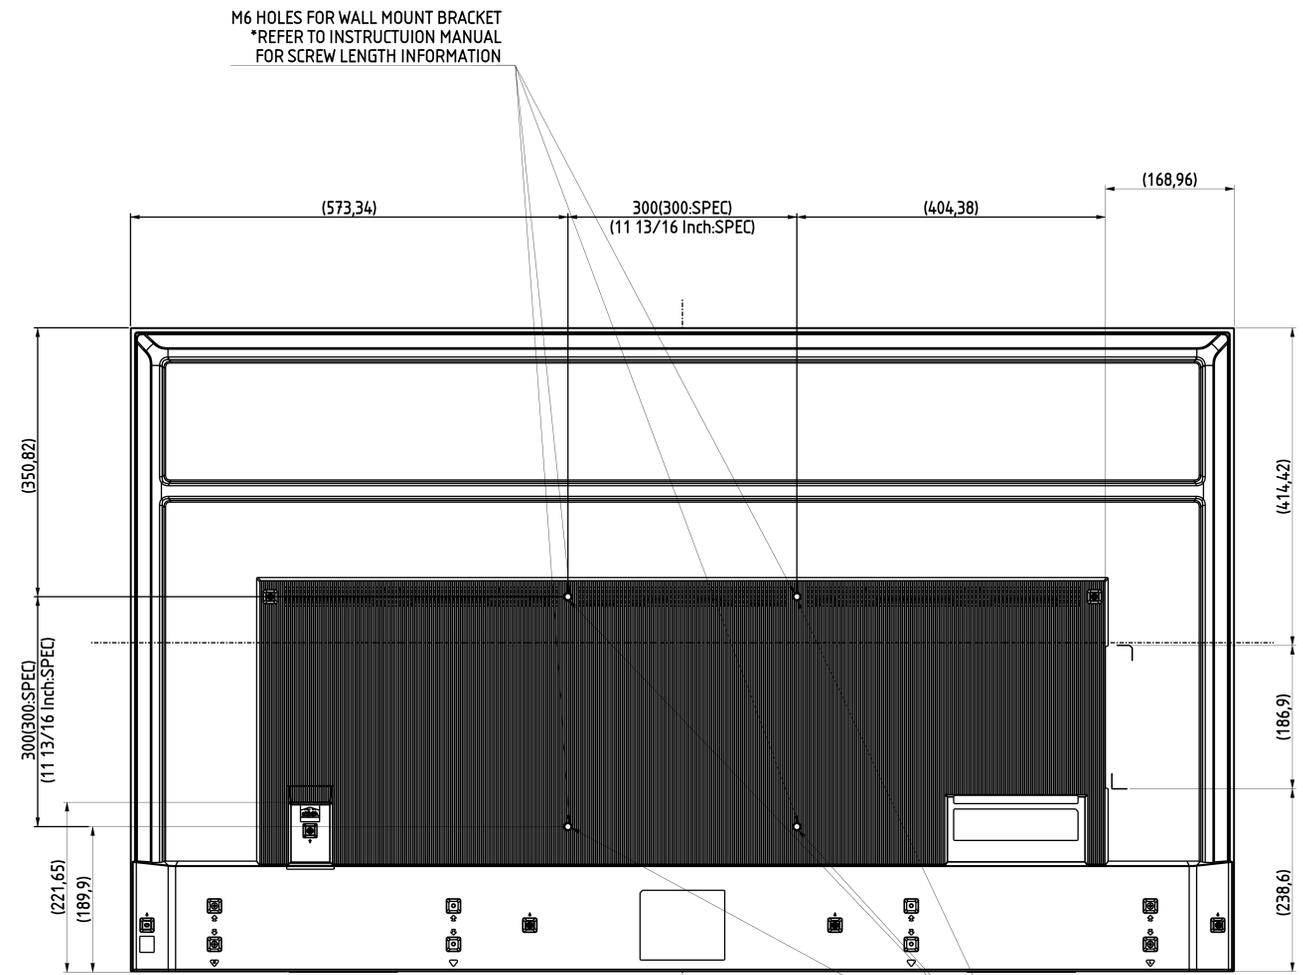

M6 HOLES FOR SECURING HARDWARE (BELT, ROPE OR CHAIN)

TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)			
RANGE OF DIM.	METAL & PLASTIC	POLYFOAM	CARTON
0 - 30	±0.10		
30 - 60	±0.15		
60 - 120	±0.20	+0/-2.0	
120 - 300	±0.25		+2.0/-0
300 - 600	±0.30		
600 - 1200	±0.40	+0/-3.0	
1200 - UPON	±0.50	+0/-4.0	
ANGLE (SHEET METAL) ± 0.5°			
Internal Diameter of Plastic Screw Boss ±0.05			




MODEL:	PROJ 3D: ID25_650_SONY1	PROJ 2D: 00_SNY_65_6V_250825
TOLERANCES UNLESS OTHERWISE STATED		
DIMENSIONS	3/64 PROJ.	
ANGLE		
6V Drawing		65" One Piece
Aug 25 25		6-4 14336
Technology Ltd.		TP TV

REVISION LIST						
ITEM	ECN NO.	POSITION	DESCRIPTION WAS	IS	DATE	UPDATED BY / APPROVED BY

SU-WL450

STANDARD

SLIM

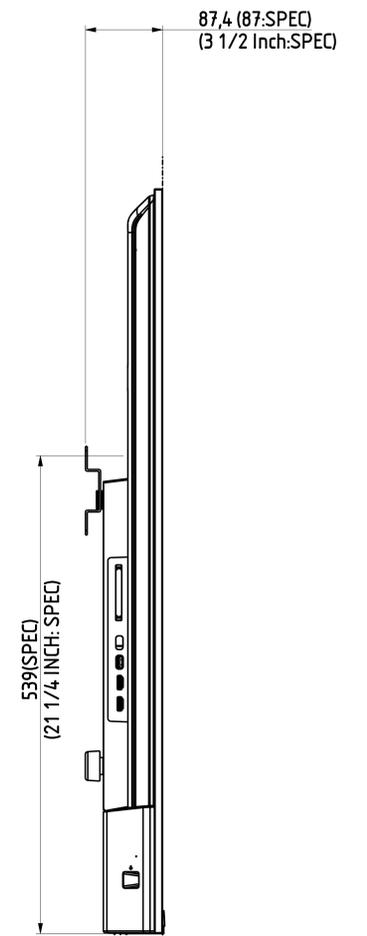
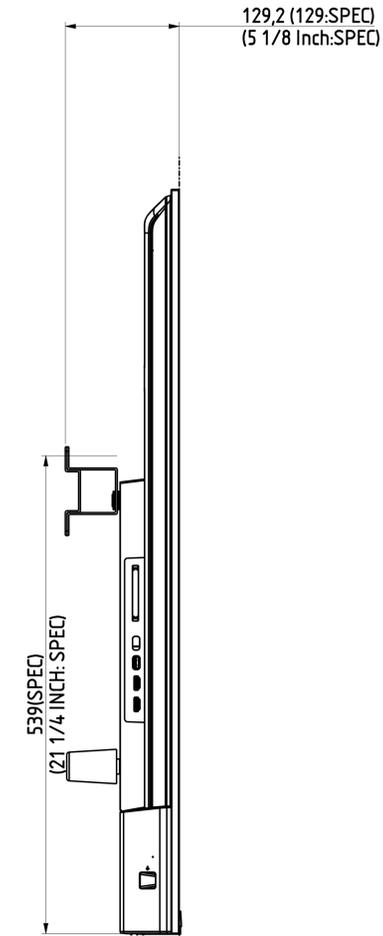
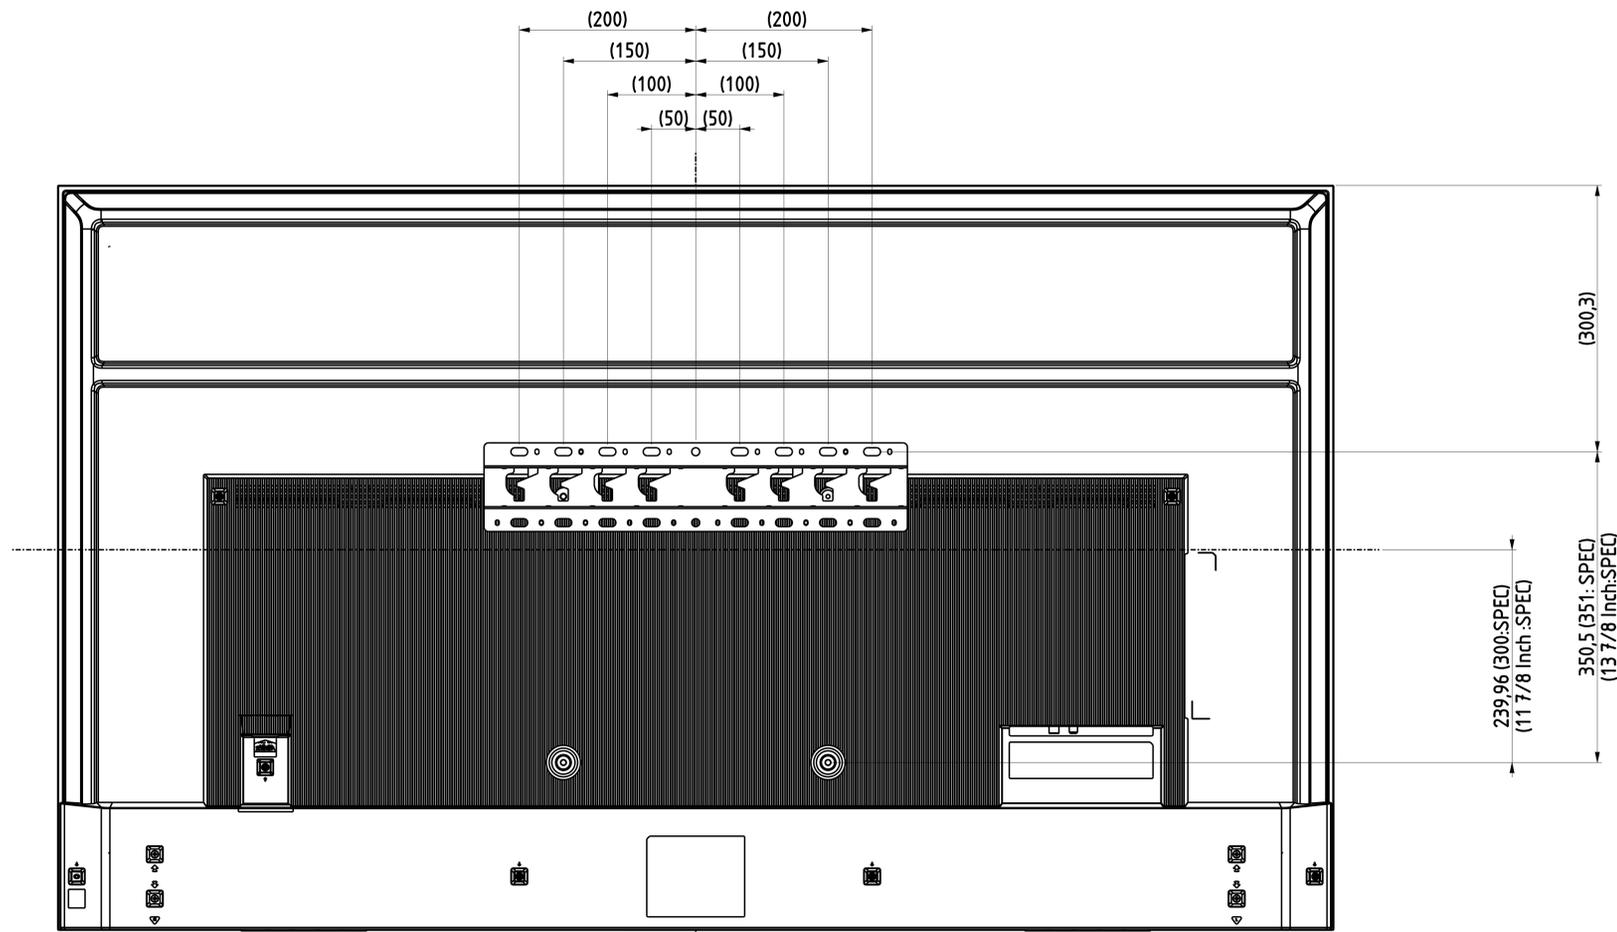


TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)			
RANGE OF DIM.	METAL & PLASTIC	POLYFOAM	CARTON
0 ~ 30	±0.10		
30 ~ 60	±0.15		
60 ~ 120	±0.20	+0/-2.0	
120 ~ 300	±0.25		
300 ~ 600	±0.30		+2.0/0
600 ~ 1200	±0.40	+0/-3.0	
1200 ~ UPON	±0.50	+0/-4.0	
ANGLE (SHEET METAL) ± 0.5°			
Internal Diameter of Plastic Screw Boss ± 0.05			

MODEL:	PROE 3D: ID25_650_SONY1	PROE 2D: 00_SNY_65_6V_250825
mm	TOLERANCES UNLESS OTHERWISE STATED	
	3rd PROC.	
0,300		
6V Drawing		65" One Piece
Aug-25-25		Technology Ltd.
		6-5 143H 1000V TP TV

ITEM	ECN NO.	POSITION	REVISION LIST		DATE	UPDATED BY	APPROVED BY
			DESCRIPTION WAS	DESCRIPTION IS			

SU-WL900

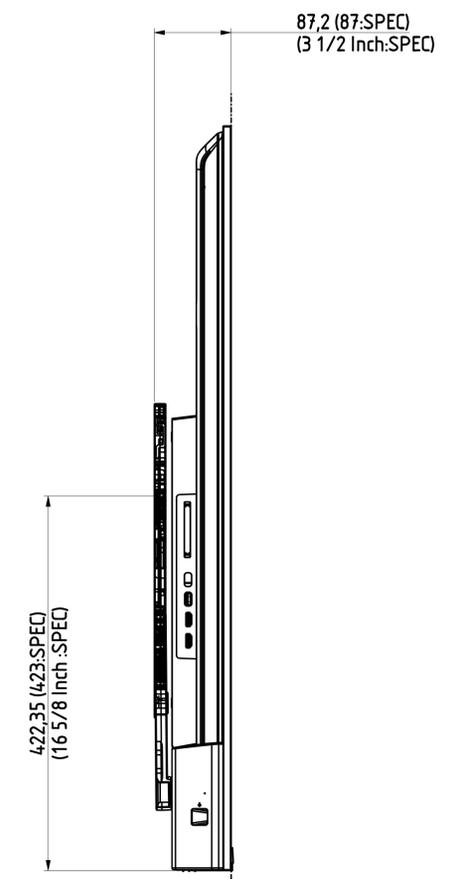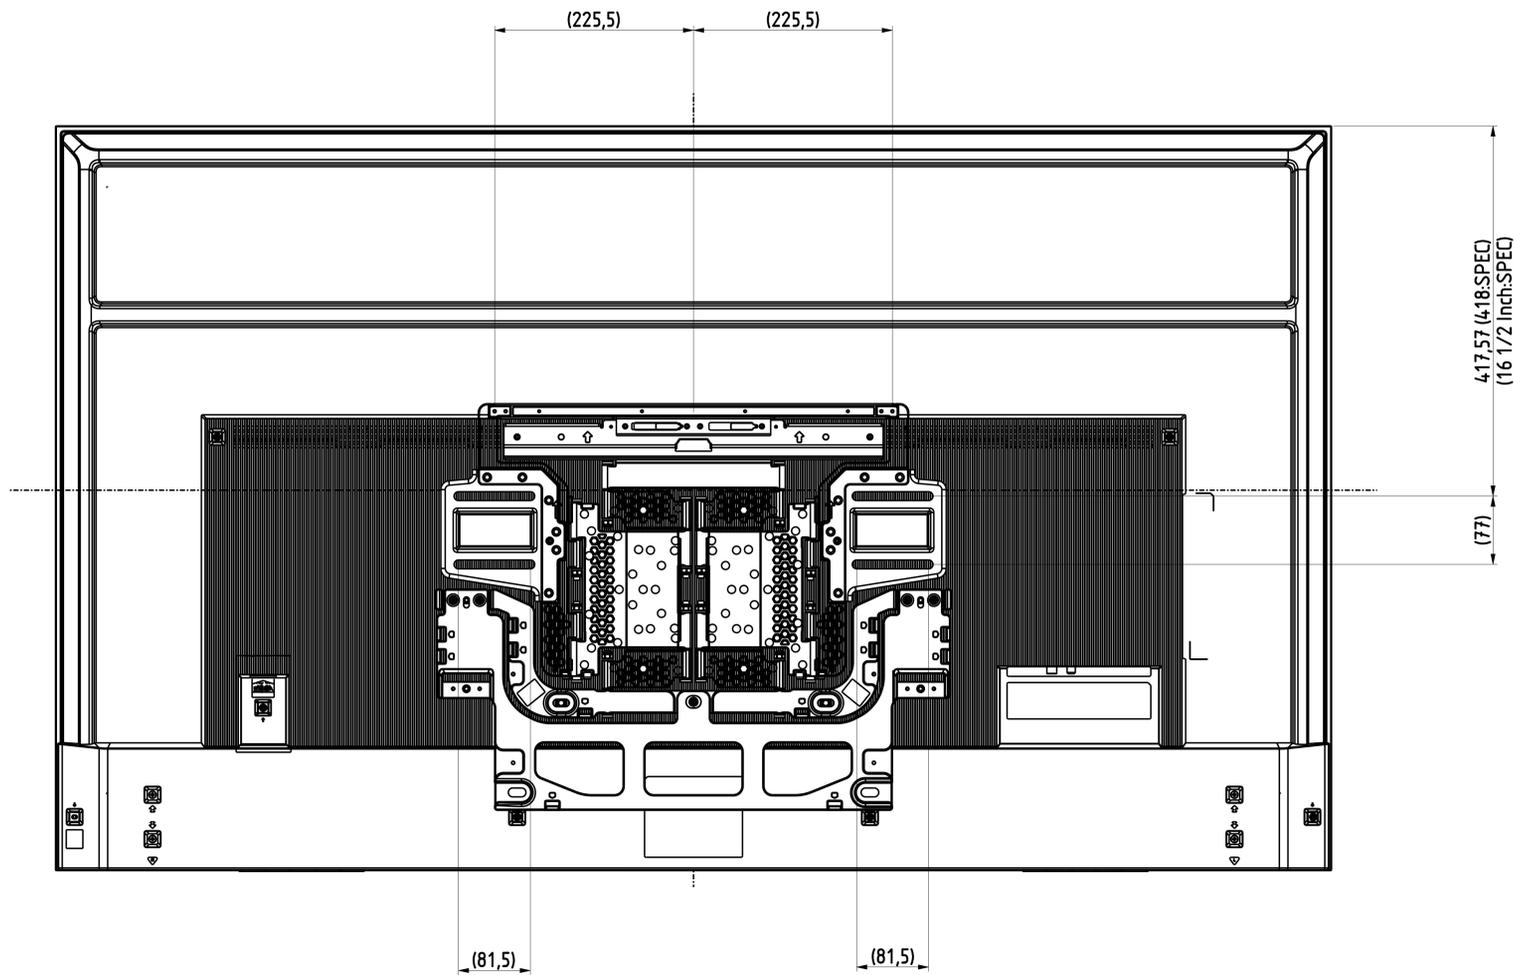

TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)			
RANGE OF DIM.	METAL & PLASTIC	POLYFOAM	CARTON
0 - 30	±0.10	+0/-2.0	+2.0/-0
30 - 60	±0.15		
60 - 120	±0.20	+0/-3.0	+0/-4.0
120 - 300	±0.25		
300 - 600	±0.30	+0/-4.0	+0/-4.0
600 - 1200	±0.40		
1200 - UPON	±0.50		
ANGLE (SHEET METAL) ± 0.5°			
Internal Diameter of Plastic Screw Boss ± 0.05			

MODEL:	PROE 3D: ID25_650_SONY1	PROE 2D: 00_SNY_65_6V_250825
mm	TOLERANCES UNLESS OTHERWISE STATED	
0,300	3rd PROJ.	
6V Drawing		65" One Piece
Aug-25-25		
Technology Ltd.		
6-6	14131	10000
TP	TV	