


Area		PA	NORTH AMERICA	LATIN AMERICA	EUROPE	IN without stand	IN with stand
Model Name		K-65XR31HM2	K-65XR30CM2	K-65XR30M2	K-65XR32M2/ K-65XR35M2/ K-65XR39M2	K-65XR36M2	-
SV No.		SV-44319	SV-44279	SV-44306	SV-44073	SV-44258	-
DIMENSION	TV only (W x H x D)	-	-	-	-	-	-
	TV only (W x H x D (D-Max))	Approx. 1447 x 841 x 70 mm	1447 x 841 x 70 mm / 57 x 33 1/8 x 2 3/4 inch	1447 x 841 x 70 mm	Approx. 144.7 x 84.1 x 7.0 cm	Approx. 1447 x 841 x 70 mm	-
	TV only with camera (W x H x D)	-	-	-	-	-	-
	TV with Stand (Standard position) (W x H x D)	-	-	-	-	-	-
	TV with Stand (Sound bar position) (W x H x D)	-	-	-	-	-	-
	TV with Stand (Outside) (W x H x D)	Approx. 1447 x 904 x 290 mm	1447 x 904 x 290 mm / 57 x 35 9/16 x 11 7/16 inch	1447 x 904 x 290 mm	Approx. 144.7 x 90.4 x 29.0 cm	-	-
	TV with Stand (Inside) (W x H x D)	-	-	-	Approx. 144.7 x 90.4 x 29.0 cm	-	-
	TV with Stand (Ouside for Soundbar) (W x H x D)	-	-	-	-	-	-
	TV with Stand (Inside for Soundbar) (W x H x D)	-	-	-	-	-	-
	TV with Stand (Narrow position) (W x H x D)	-	-	-	-	-	-
	Stand Width (Standard position)	-	-	-	-	-	-
	Stand Width (Sound bar position)	-	-	-	-	-	-
	Stand Width (Outside)	Approx. 1255 mm	1255 mm / 49 7/16 inch	1255 mm	Approx. 125.5 cm	-	-
	Stand Width (Inside)	-	-	-	Approx. 62.8 cm	-	-
	Stand Width (Narrow position)	-	-	-	-	-	-
	Stand Inner Distance	-	-	-	-	-	-
	Stand Inner Distance (Inside position)	-	-	-	Approx. 61.0 cm	-	-
	Stand Inner Distance (Outside position)	Approx. 1237 mm	1237 mm / 48 11/16 inch	1237 mm	Approx. 123.7 cm	-	-
	Dimension of Stand (W x H x D)	Approx. 9 x 64 x 290 mm	9 x 64 x 290 mm / 3/8 x 2 1/2 x 11 7/16 inch	9 x 64 x 290 mm	Approx. 0.9 x 6.4 x 29.0 cm	-	-
	Dimension of Stand (Low) (W x H x D)	-	-	-	-	-	-
	Dimension of Stand (High) (W x H x D)	-	-	-	-	-	-
	VESA Hole Pitch	300 x 300 mm	300 x 300 mm / 11 13/16 x 11 13/16 inch	300 x 300 mm	30.0 x 30.0 cm	300 x 300 mm	-
WEIGHT	TV Only	Approx. 20.8 kg	20.8 kg / 45.9 lb	20.8 kg	Approx. 21.4 kg	Approx. 20.8 kg	-
	TV with Stand	Approx. 21.2 kg	21.2 kg / 46.8 lb	21.2 kg	Approx. 21.8 kg	-	-
Remarks							

REVISION LIST							
ITEM	ECN NO.	POSITION	DESCRIPTION		DATE	UPDATED BY	APPROVED BY
			WAS	IS			


TV with Stand (Outside)

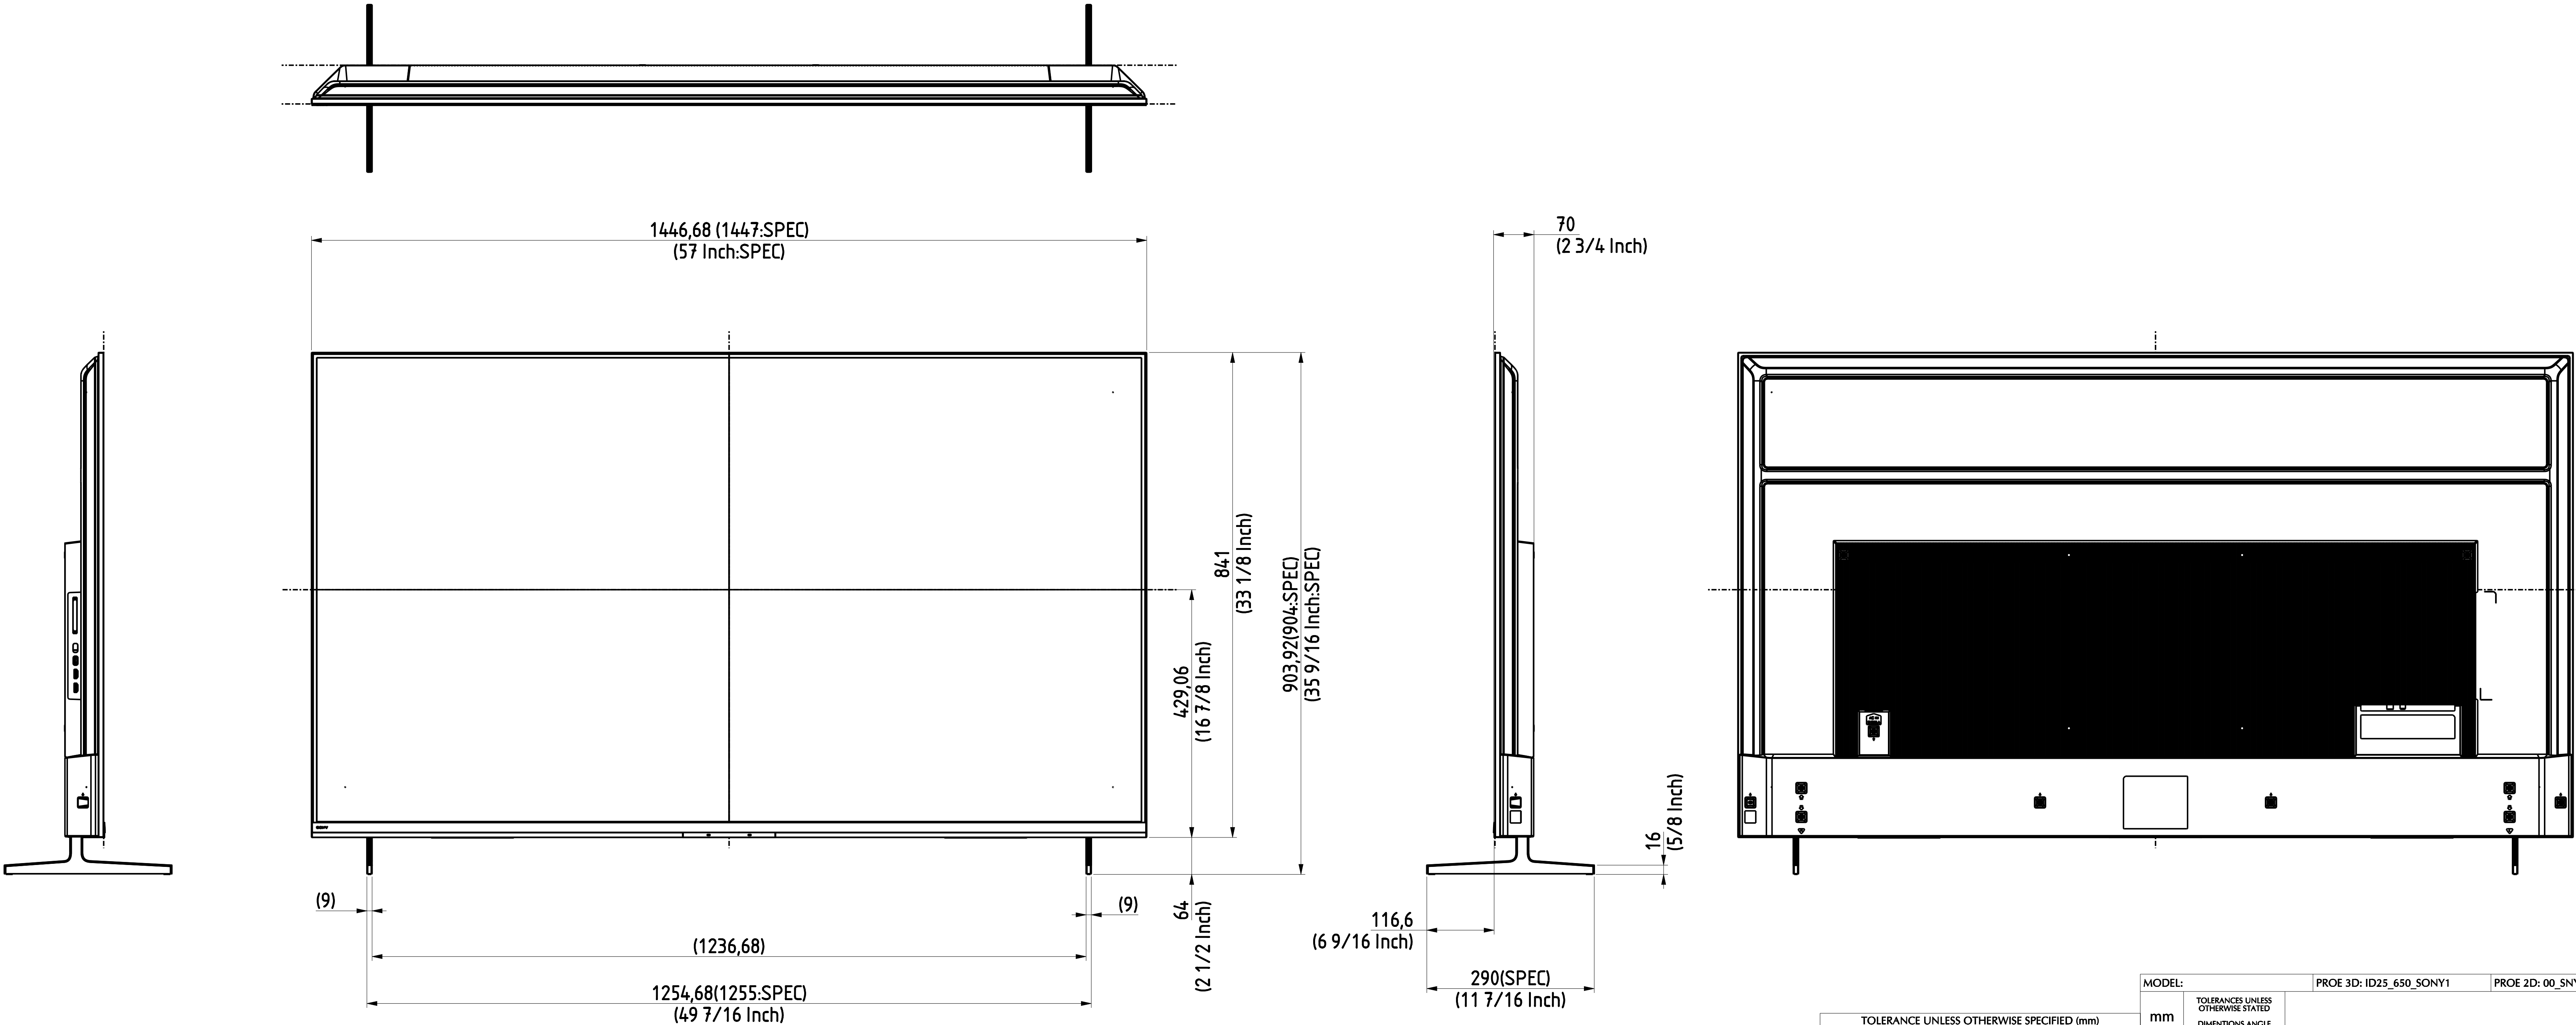

				MODEL:		PROE 3D: ID25_650_SONY1		PROE 2D: 00_SNY_65_6V_250825				
TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)				mm		TOLERANCES UNLESS OTHERWISE STATED DIMENSIONS ANGLE						
RANGE OF DIM.	METAL & PLASTIC	POLYFOAM	CARTON			3rd PROJ.						
0 ~ 30	±0.10	+ 0/-2.0	+ 2.0/-0	0,200								
30 ~ 60	±0.15											
60 ~ 120	±0.20											
120 ~ 300	±0.25											
300 ~ 600	±0.30	6V Drawing										
600 ~ 1200	±0.40					+ 0/-3.0						
1200 ~ UPON	±0.50					+ 0/-4.0						
ANGLE (SHEET METAL)		± 0.5°				Aug-25-25						
Internal Diameter of Plastic Screw Boss				±0.05								
										Technology Ltd.		
										TP 6-1 16 TV		

REVISION LIST							
ITEM	ECN NO.	POSITION	DESCRIPTION		DATE	UPDATED BY	APPROVED BY
			WAS	IS			

TV with Stand (Outside)

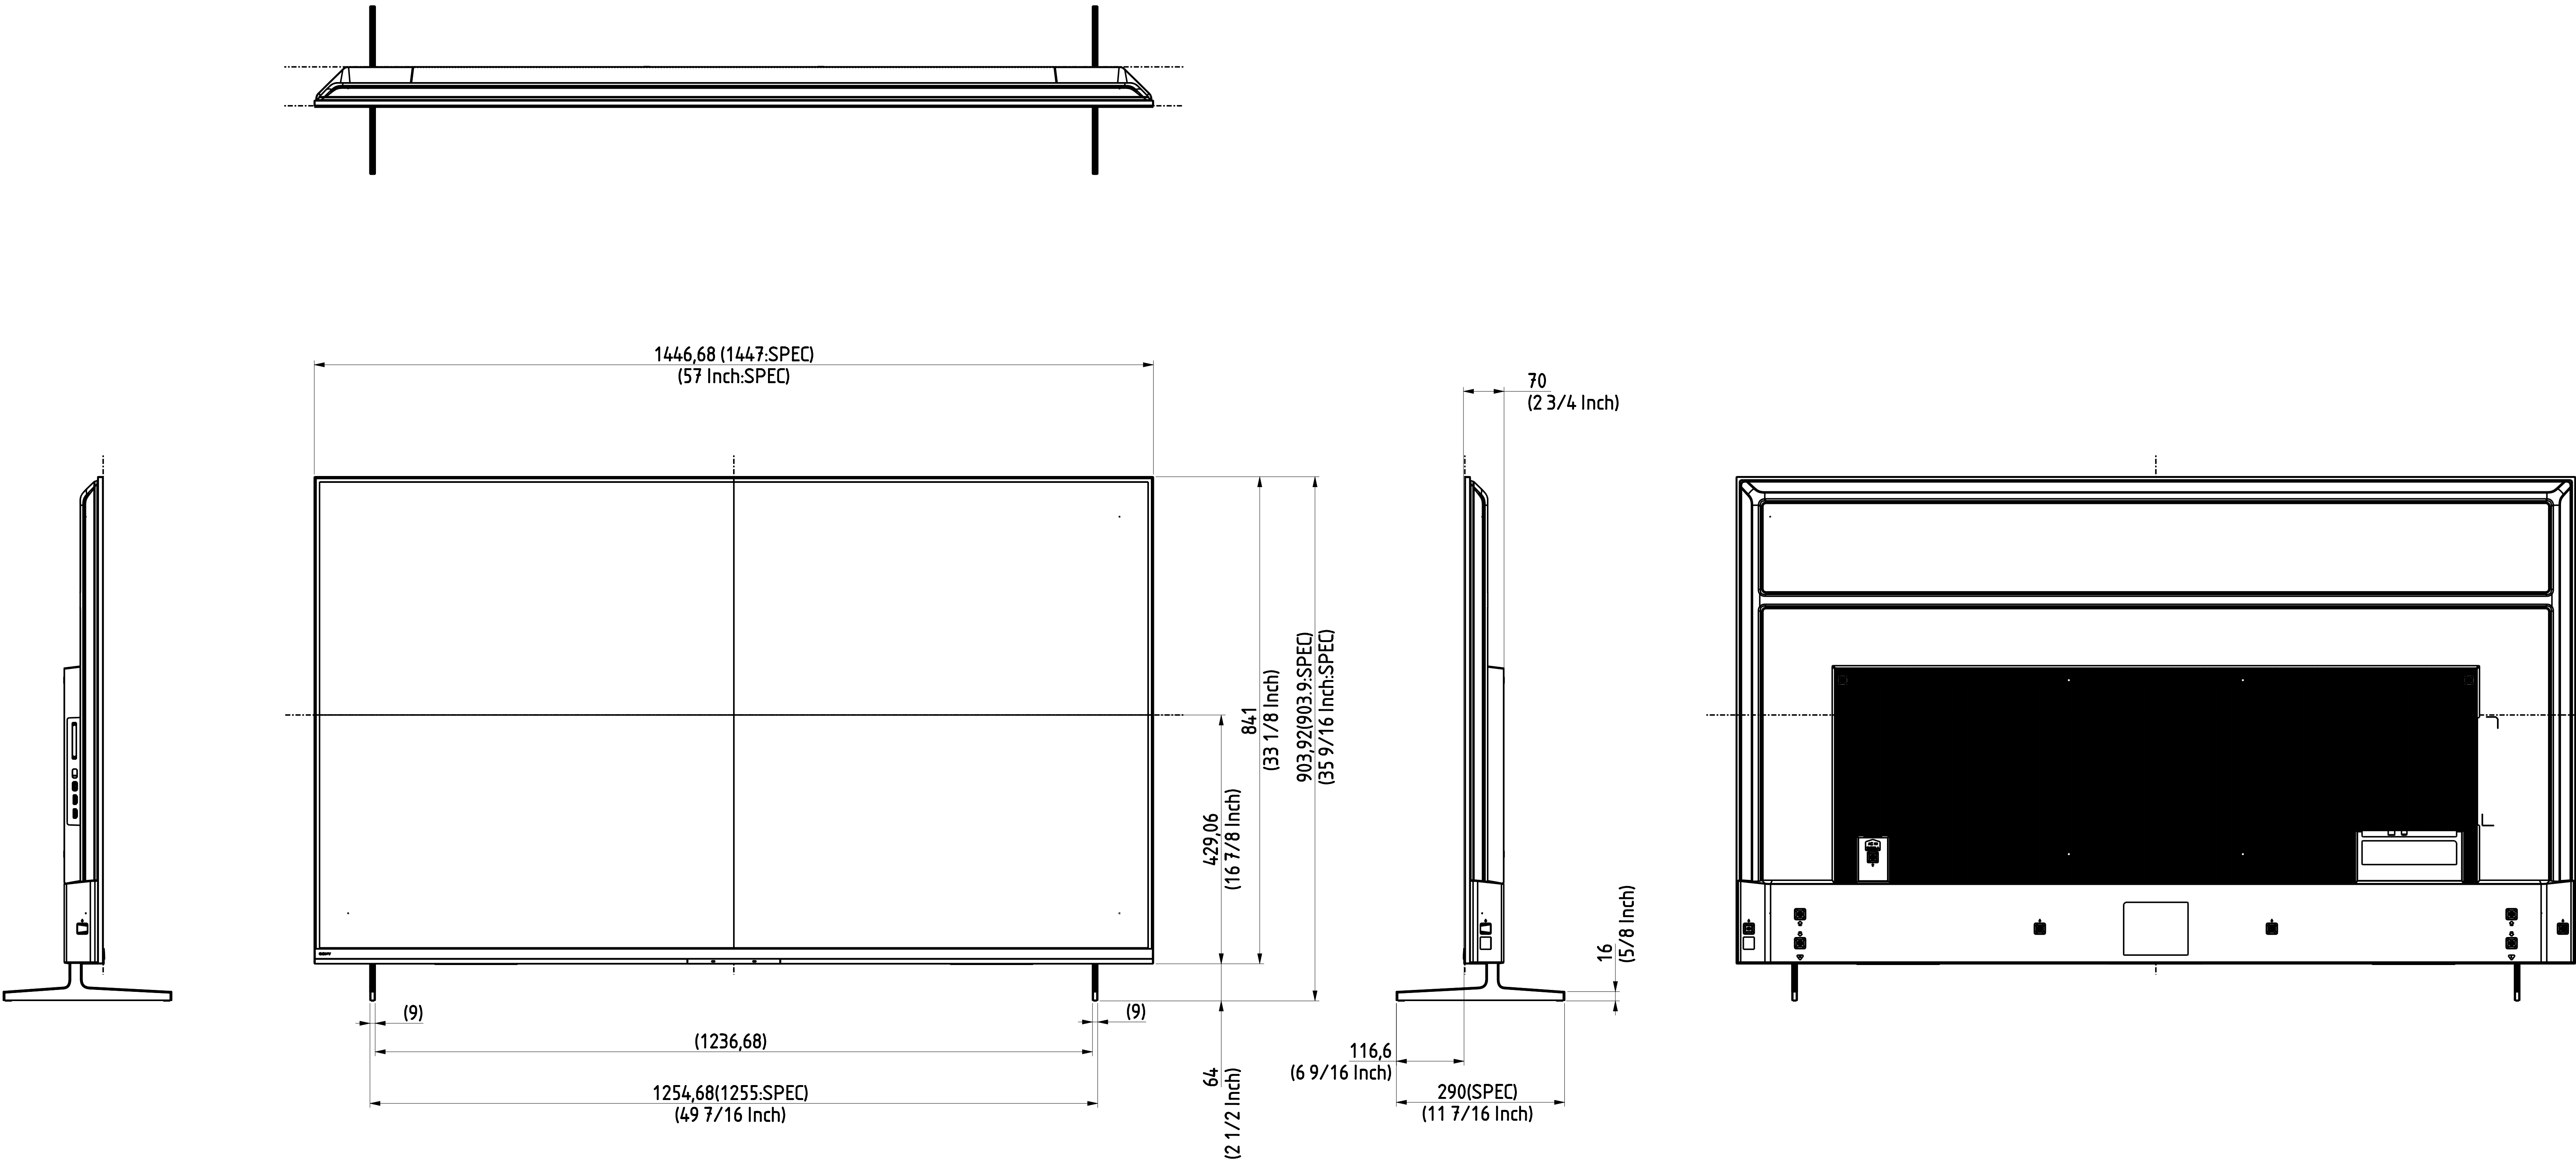


TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)			
RANGE OF DIM.	METAL & PLASTIC	POLYFOAM	CARTON
0 ~ 30	±0.10	+0/-2.0	+2.0/0
30 ~ 60	±0.15		
60 ~ 120	±0.20		
120 ~ 300	±0.25		
300 ~ 600	±0.30		
600 ~ 1200	±0.40	+0/-3.0	
1200 ~ UPON	±0.50	+0/-4.0	
ANGLE (SHEET METAL)		± 0.5°	
Internal Diameter of Plastic Screw Boss ±0.05			

MODEL:		PROE 3D: ID25_650_SONY1		PROE 2D: 00_SNY_65_6V_250825	
mm	TOLERANCES UNLESS OTHERWISE STATED DIMENSIONS ANGLED				
	3rd PROJ.				
0,200					
6V Drawing					
		Aug-25-25		Technology Ltd.	
				TP	6-2 TV

REVISION LIST							
ITEM	ECN NO.	POSITION	DESCRIPTION		DATE	UPDATED BY	APPROVED BY
			WAS	IS			




TV with Stand (Inside)

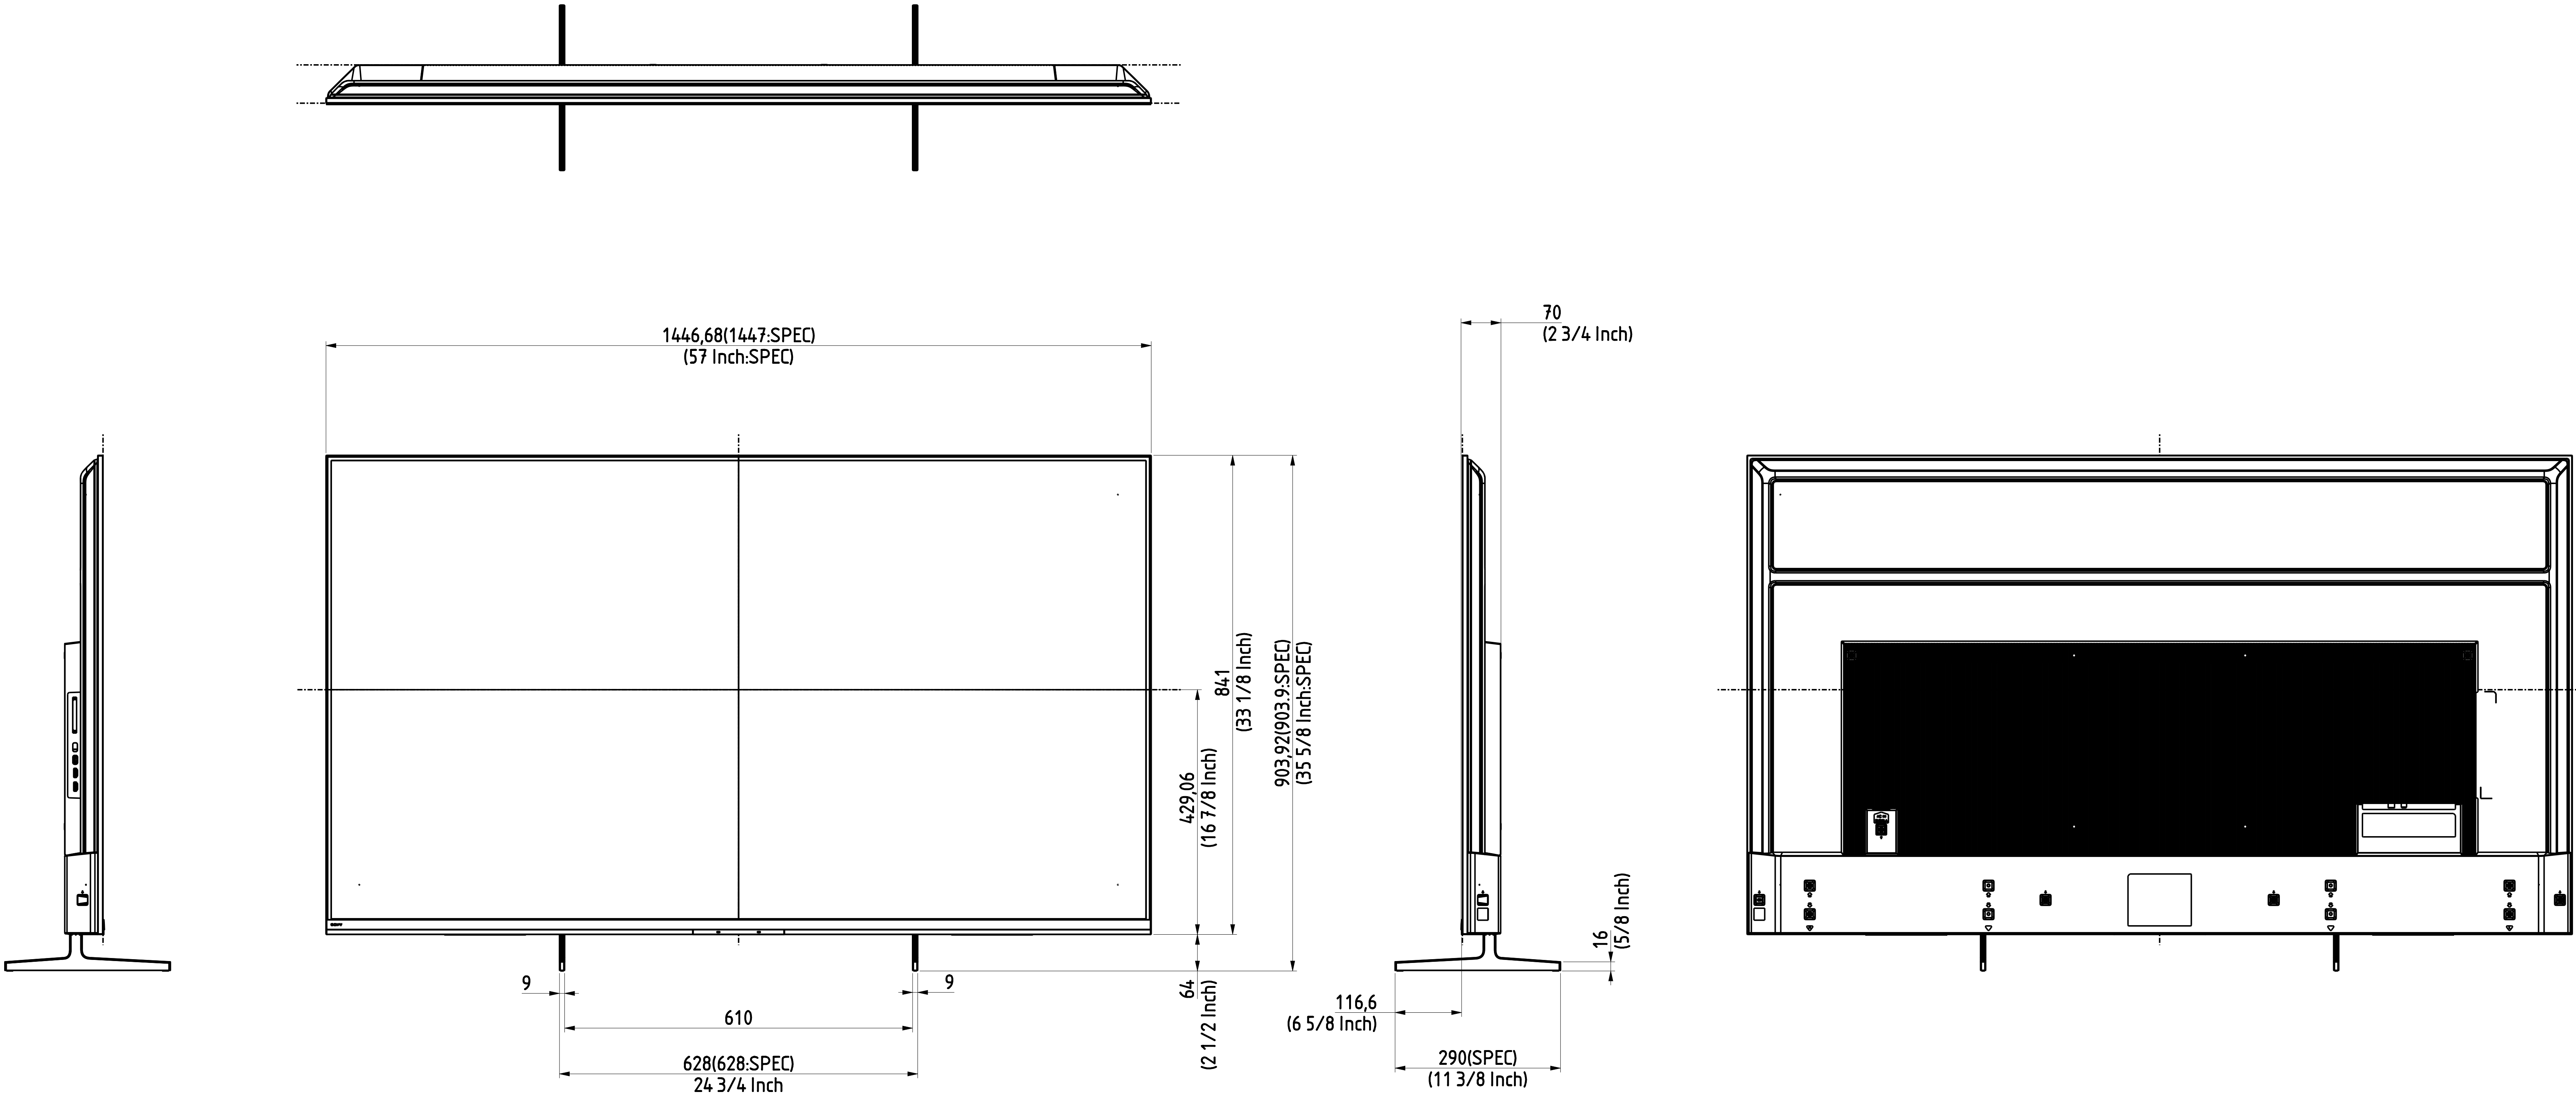

				MODEL:		PROE 3D: ID25_650_SONY1		PROE 2D: 00_SNY_65_6V_250825	
TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)				mm	TOLERANCES UNLESS OTHERWISE STATED				
RANGE OF DIM.		METAL & PLASTIC	POLYFOAM		CARTON	DIMENSIONS ANGLE			
0 ~ 30		±0.10	+0/-2.0	+2.0/-0	0,200	3rd PROJ.			
30 ~ 60		±0.15							
60 ~ 120		±0.20							
120 ~ 300		±0.25							
300 ~ 600		±0.30							
600 ~ 1200		±0.40	+0/-3.0	+0/-4.0	6V Drawing				
1200 ~ UPON		±0.50	+0/-4.0						
ANGLE (SHEET METAL)				± 0.5°		Aug-25-25			
Internal Diameter of Plastic Screw Boss				±0.05					
								Technology Ltd.	
								TP	6-3 1413H 1000V TV

REVISION LIST							
ITEM	ECN NO.	POSITION	DESCRIPTION WAS	IS	DATE	UPDATED BY	APPROVED BY

TV Only

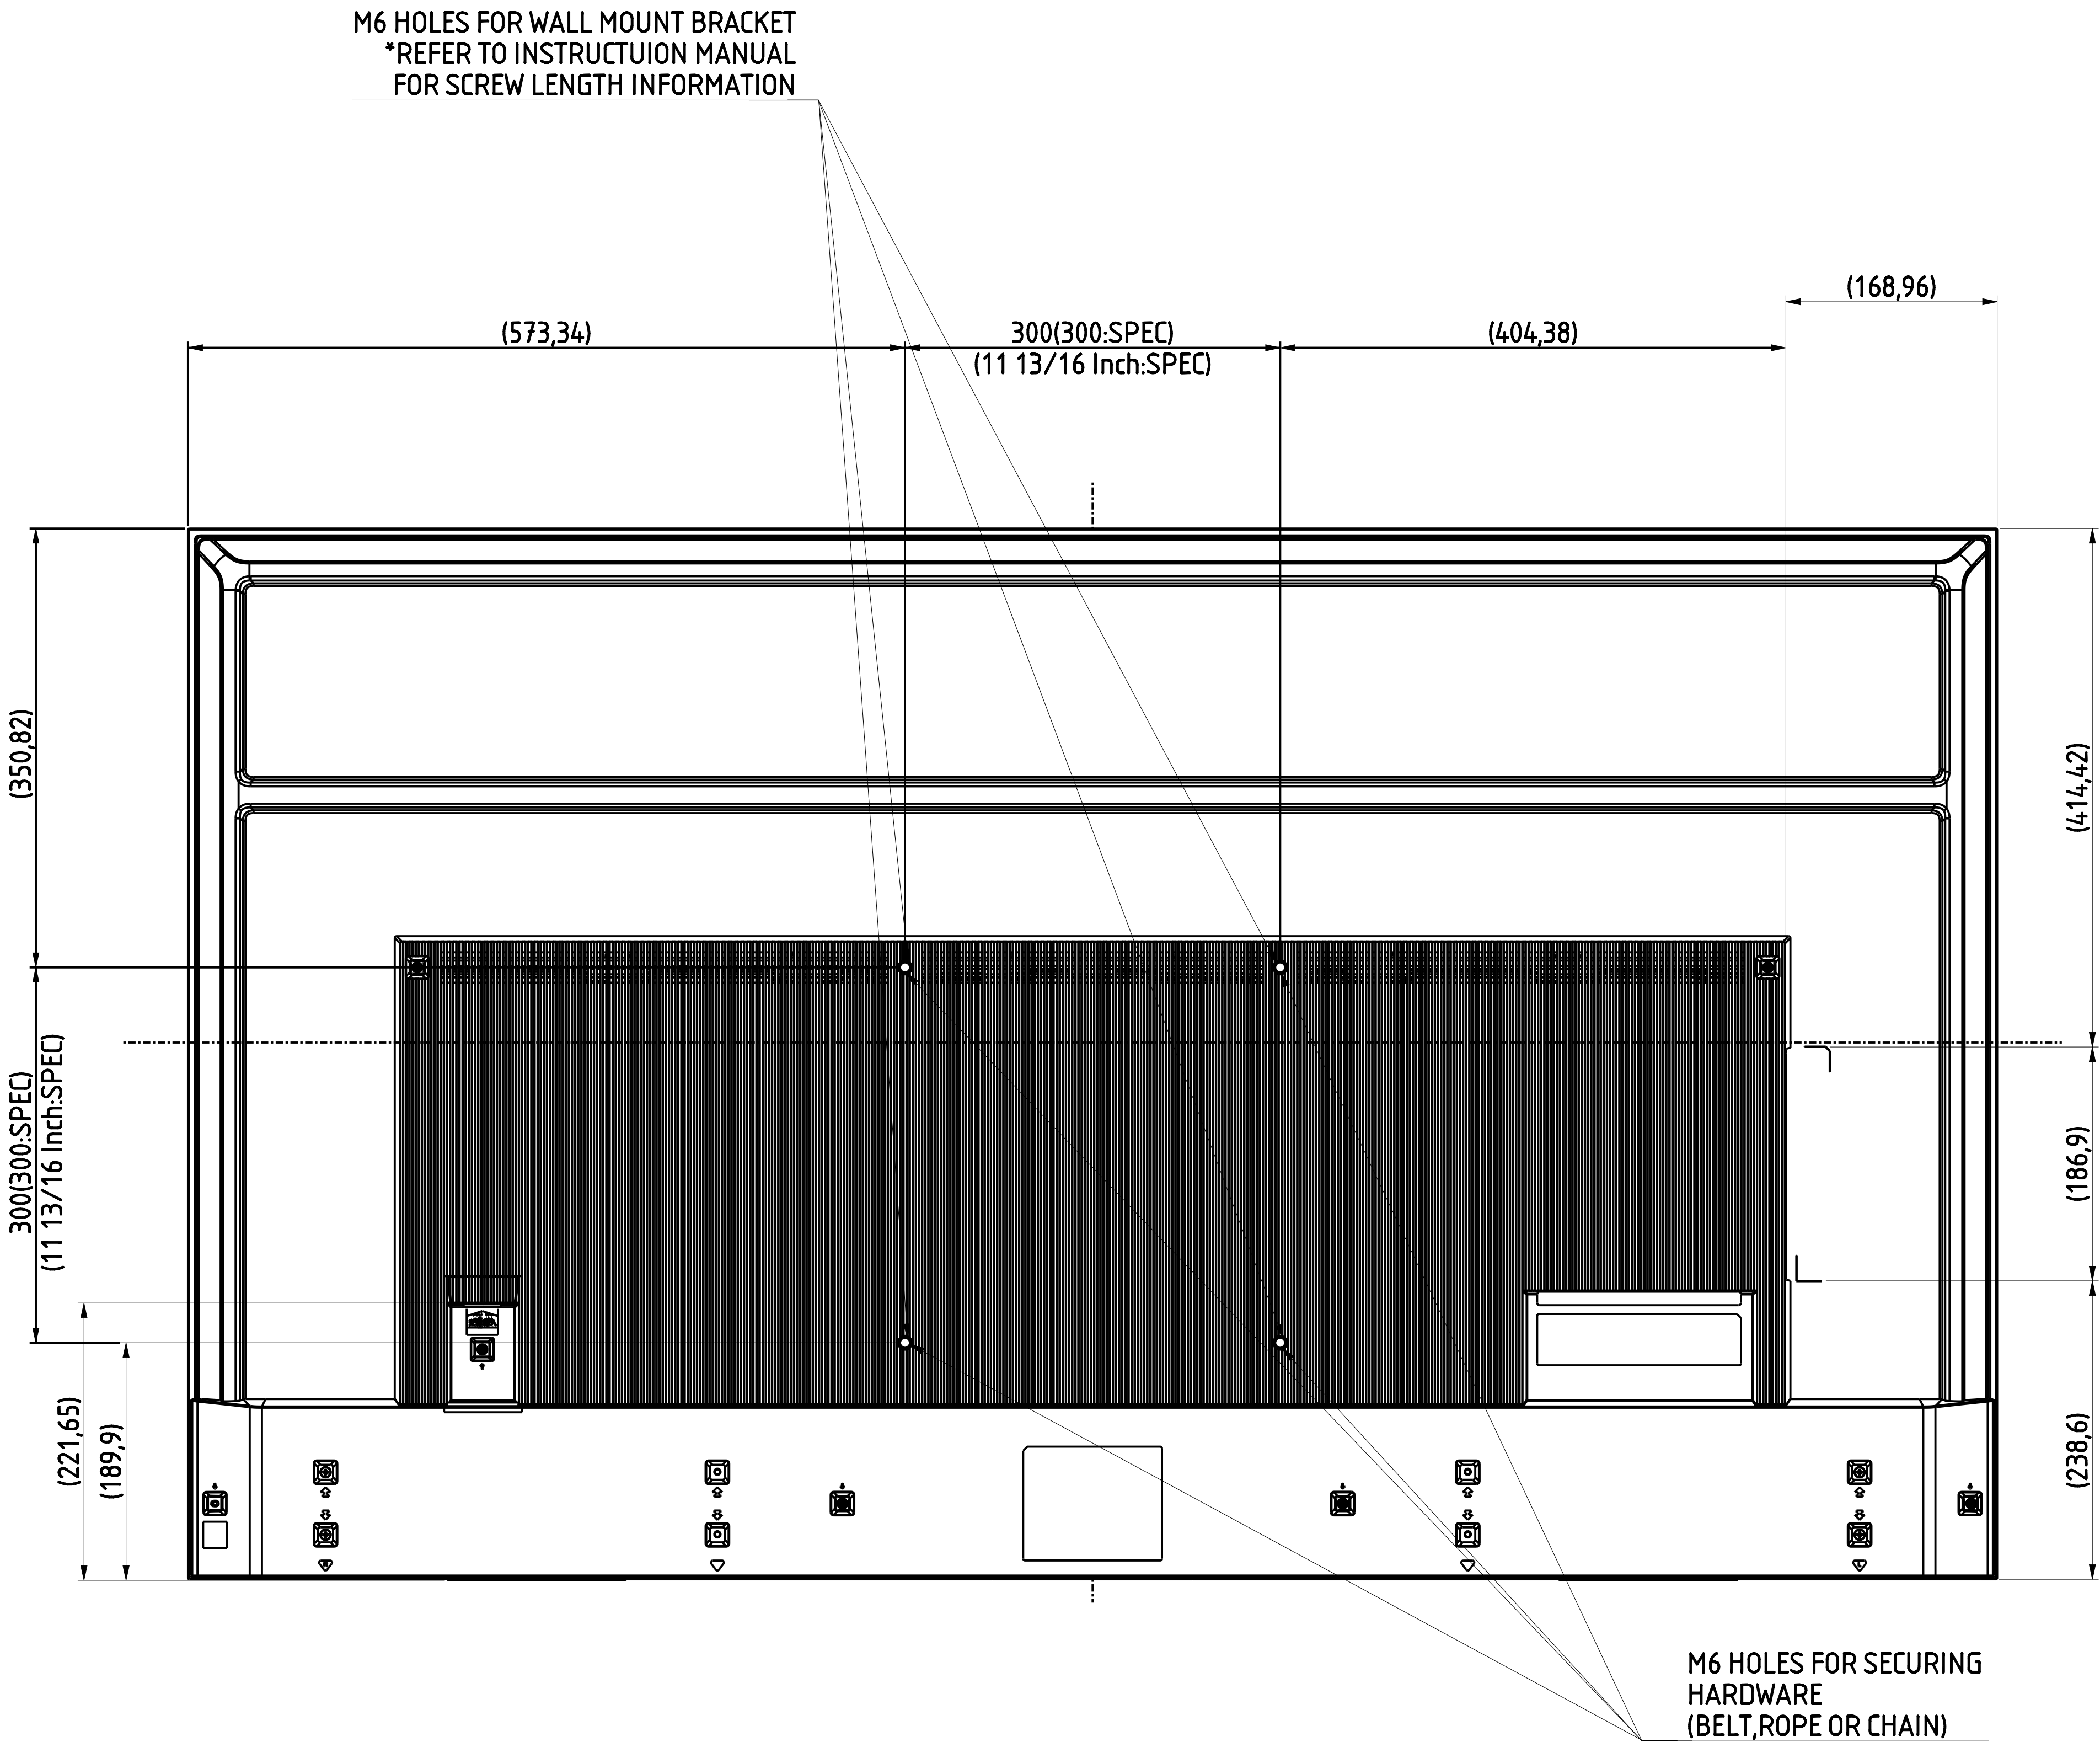
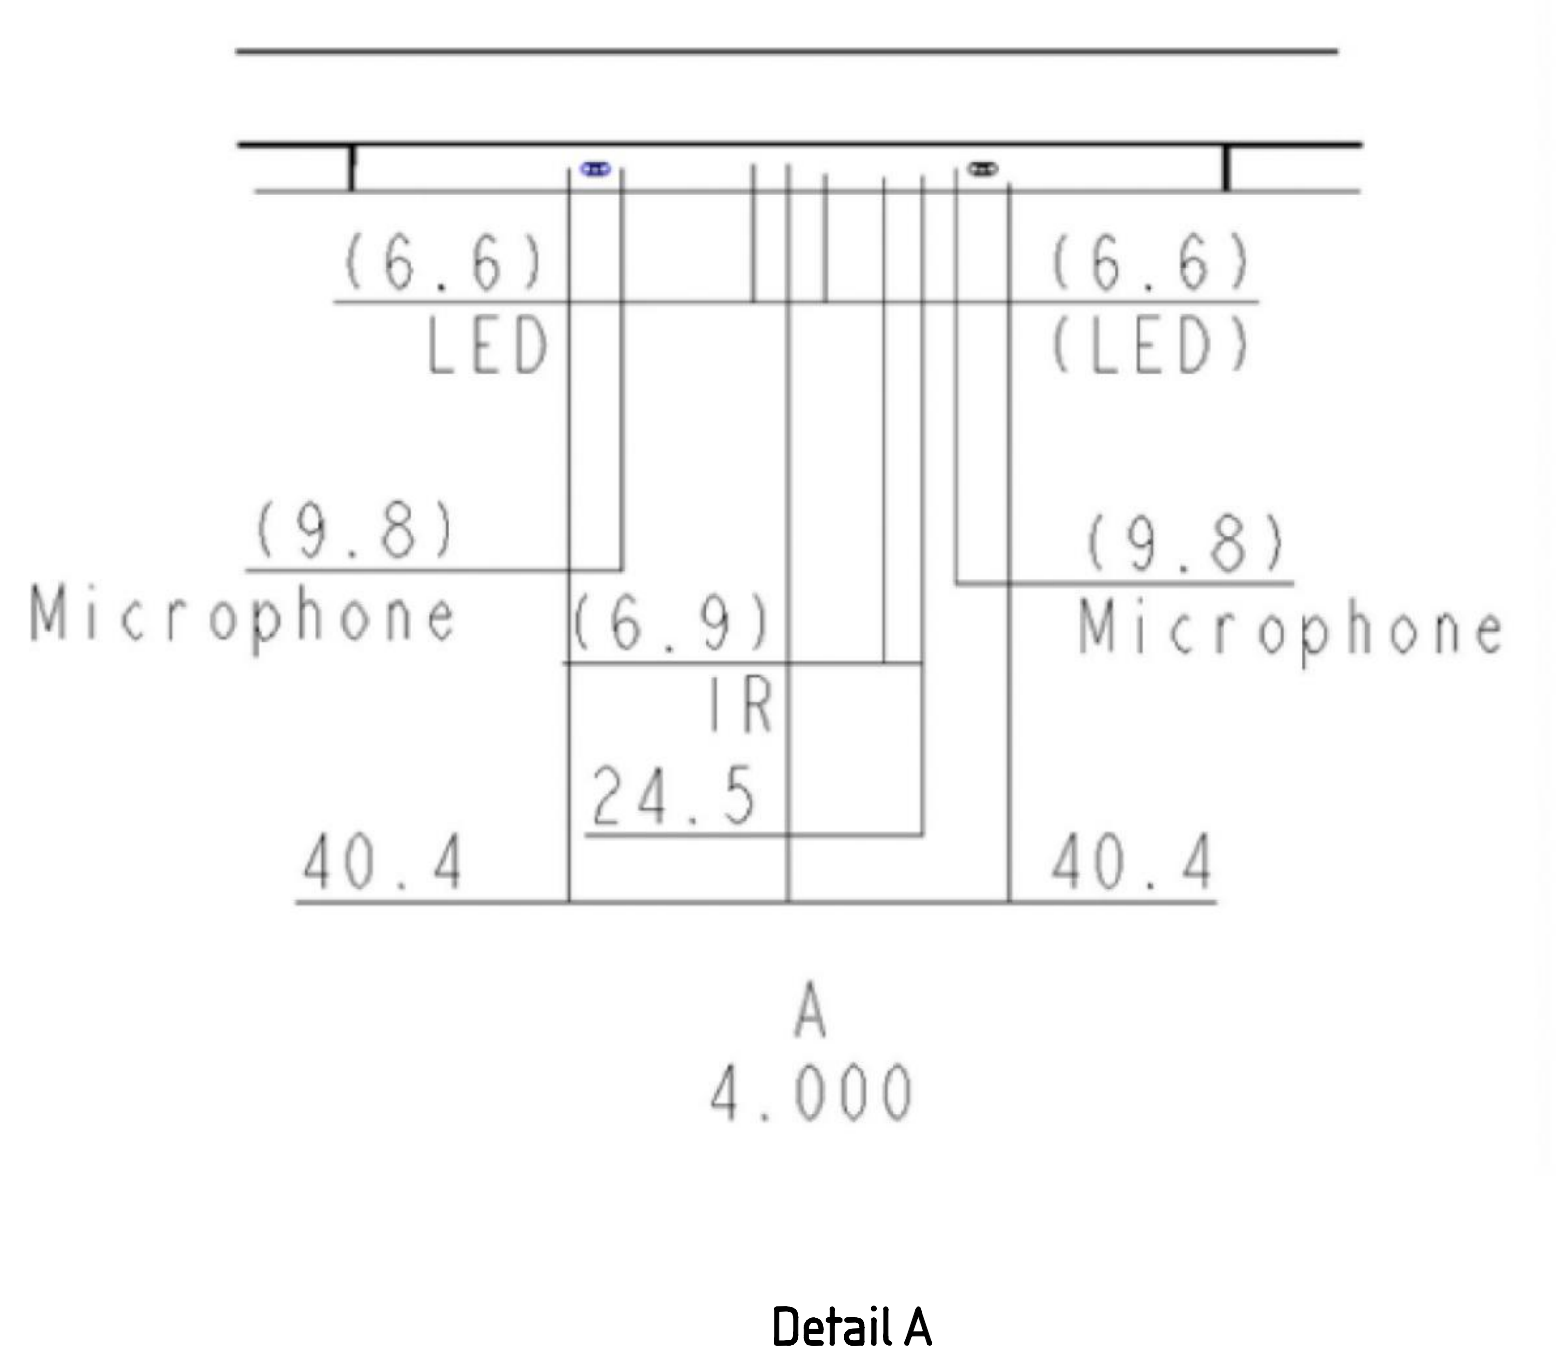
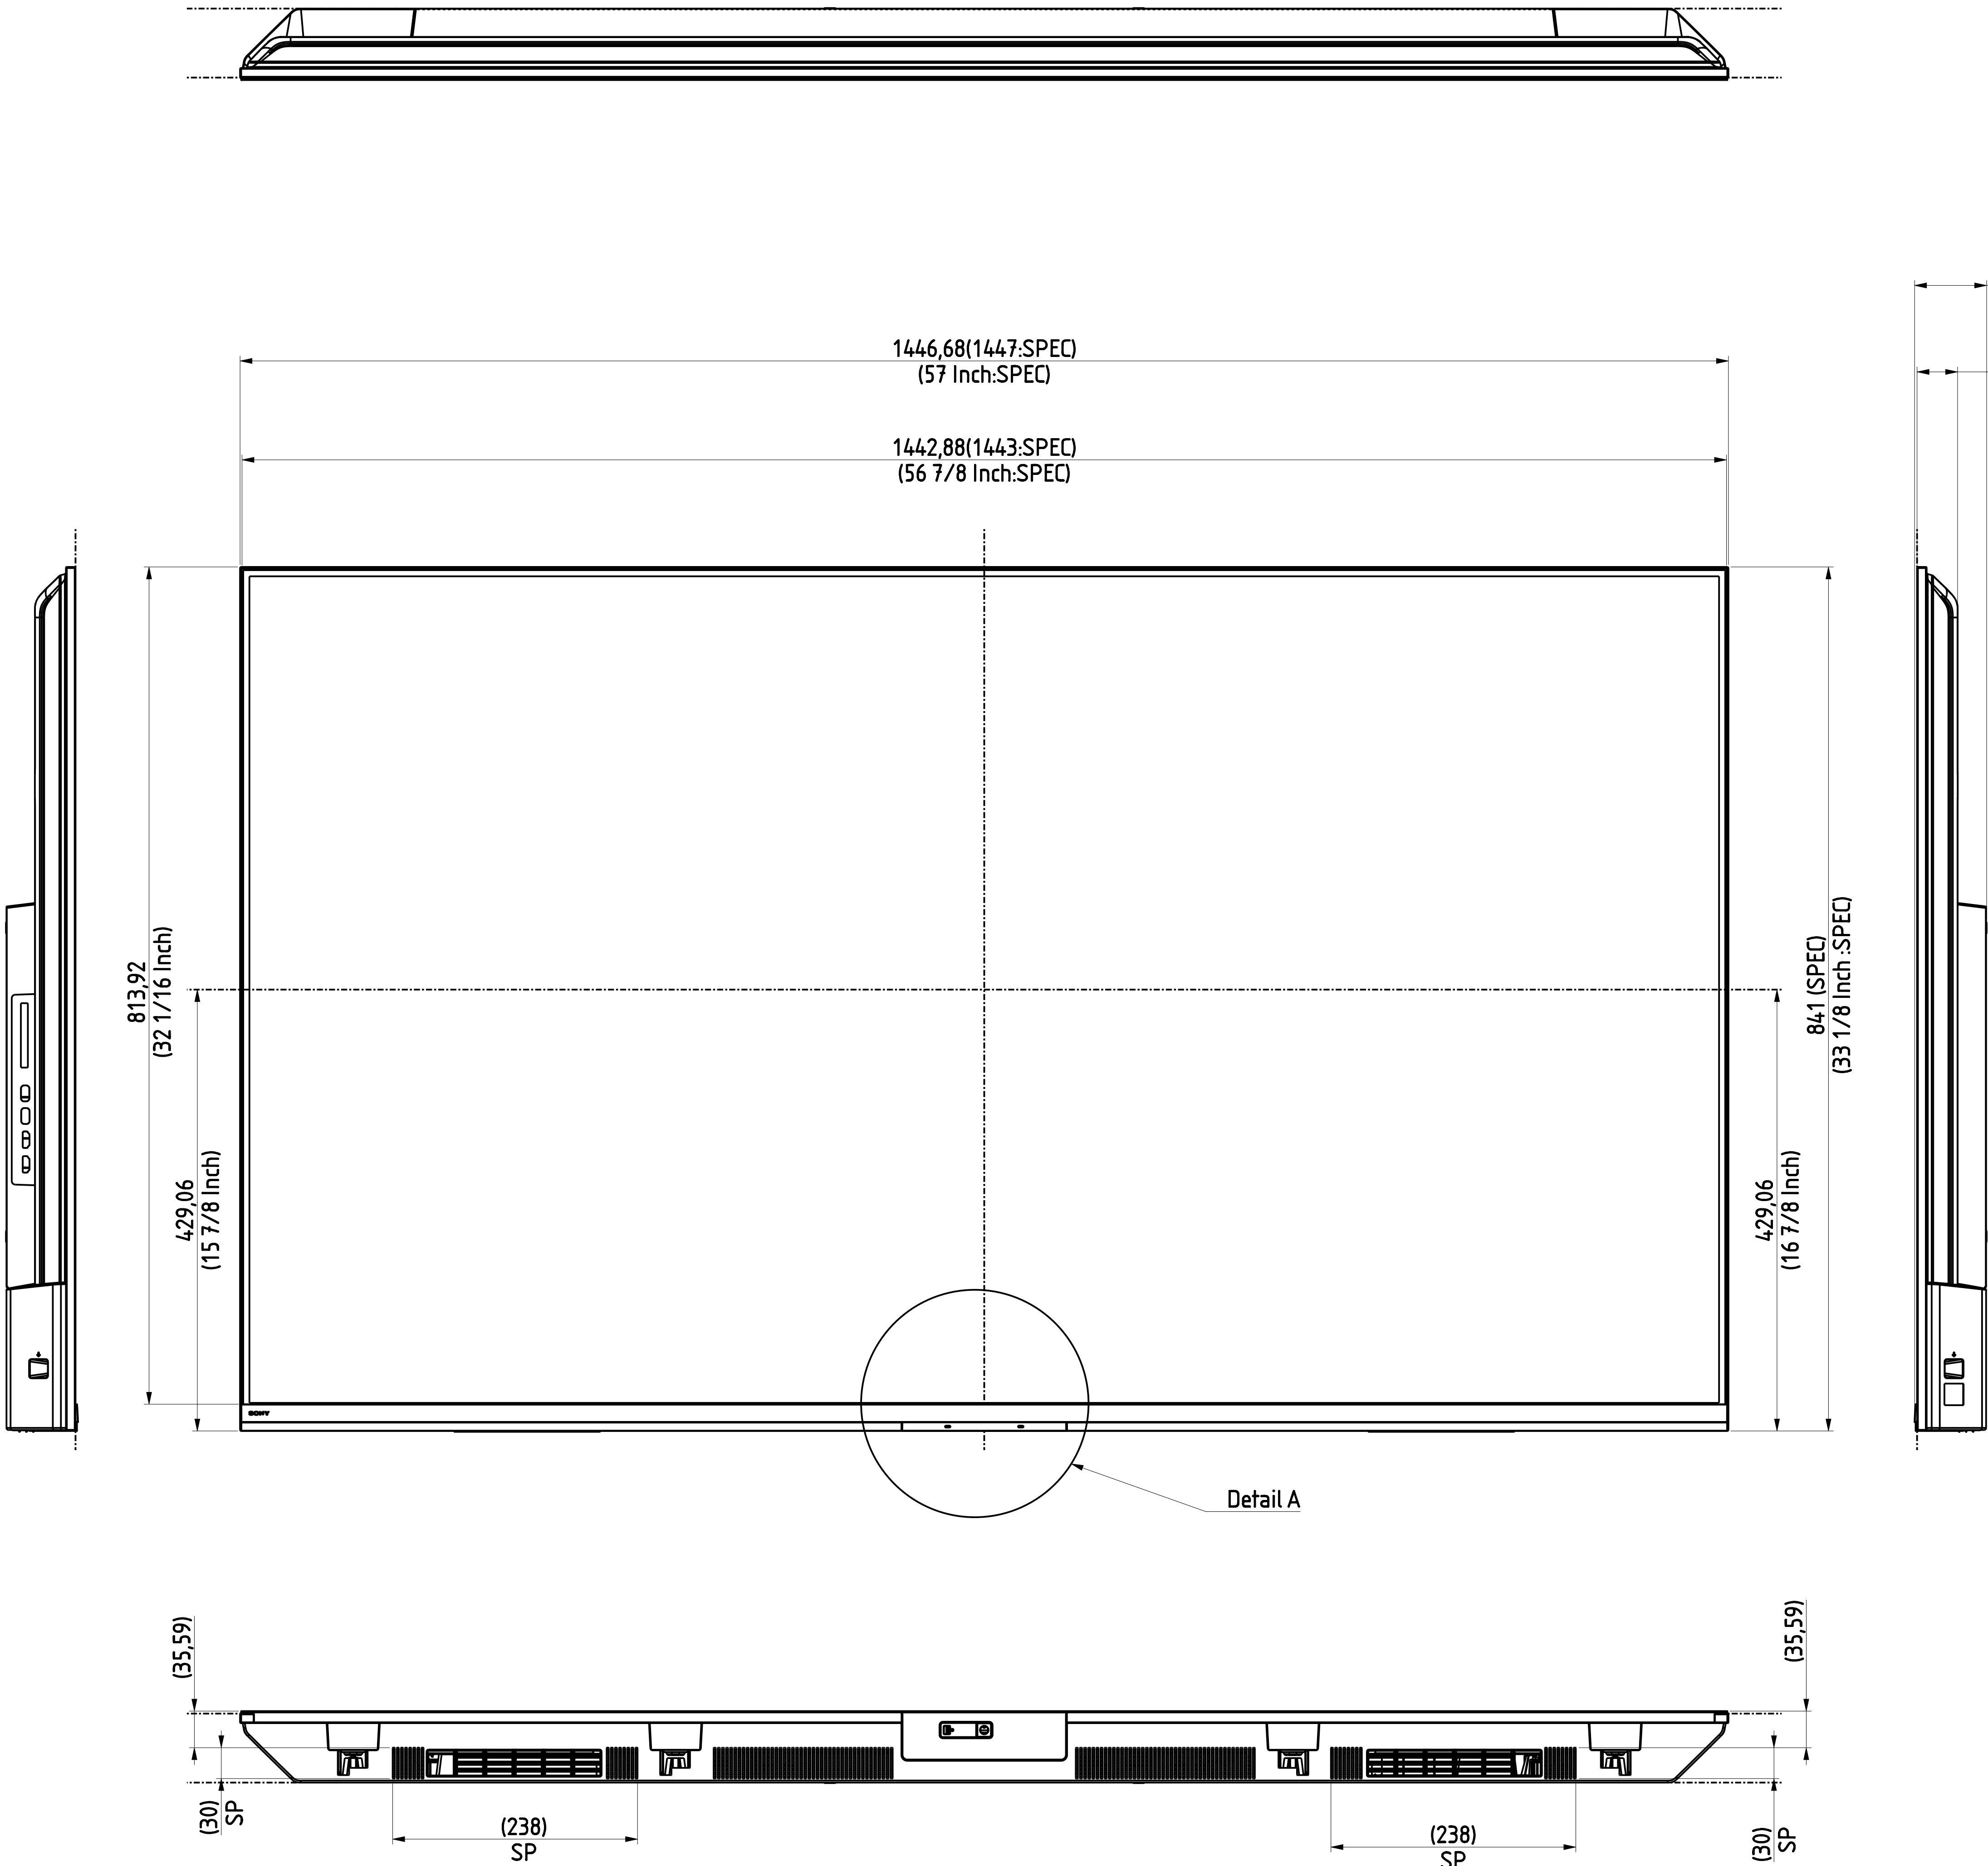


REVISION LIST							
ITEM	ECN NO.	POSITION	DESCRIPTION WAS	IS	DATE	UPDATED BY	APPROVED BY

SU-WL450

STANDARD




SLIM

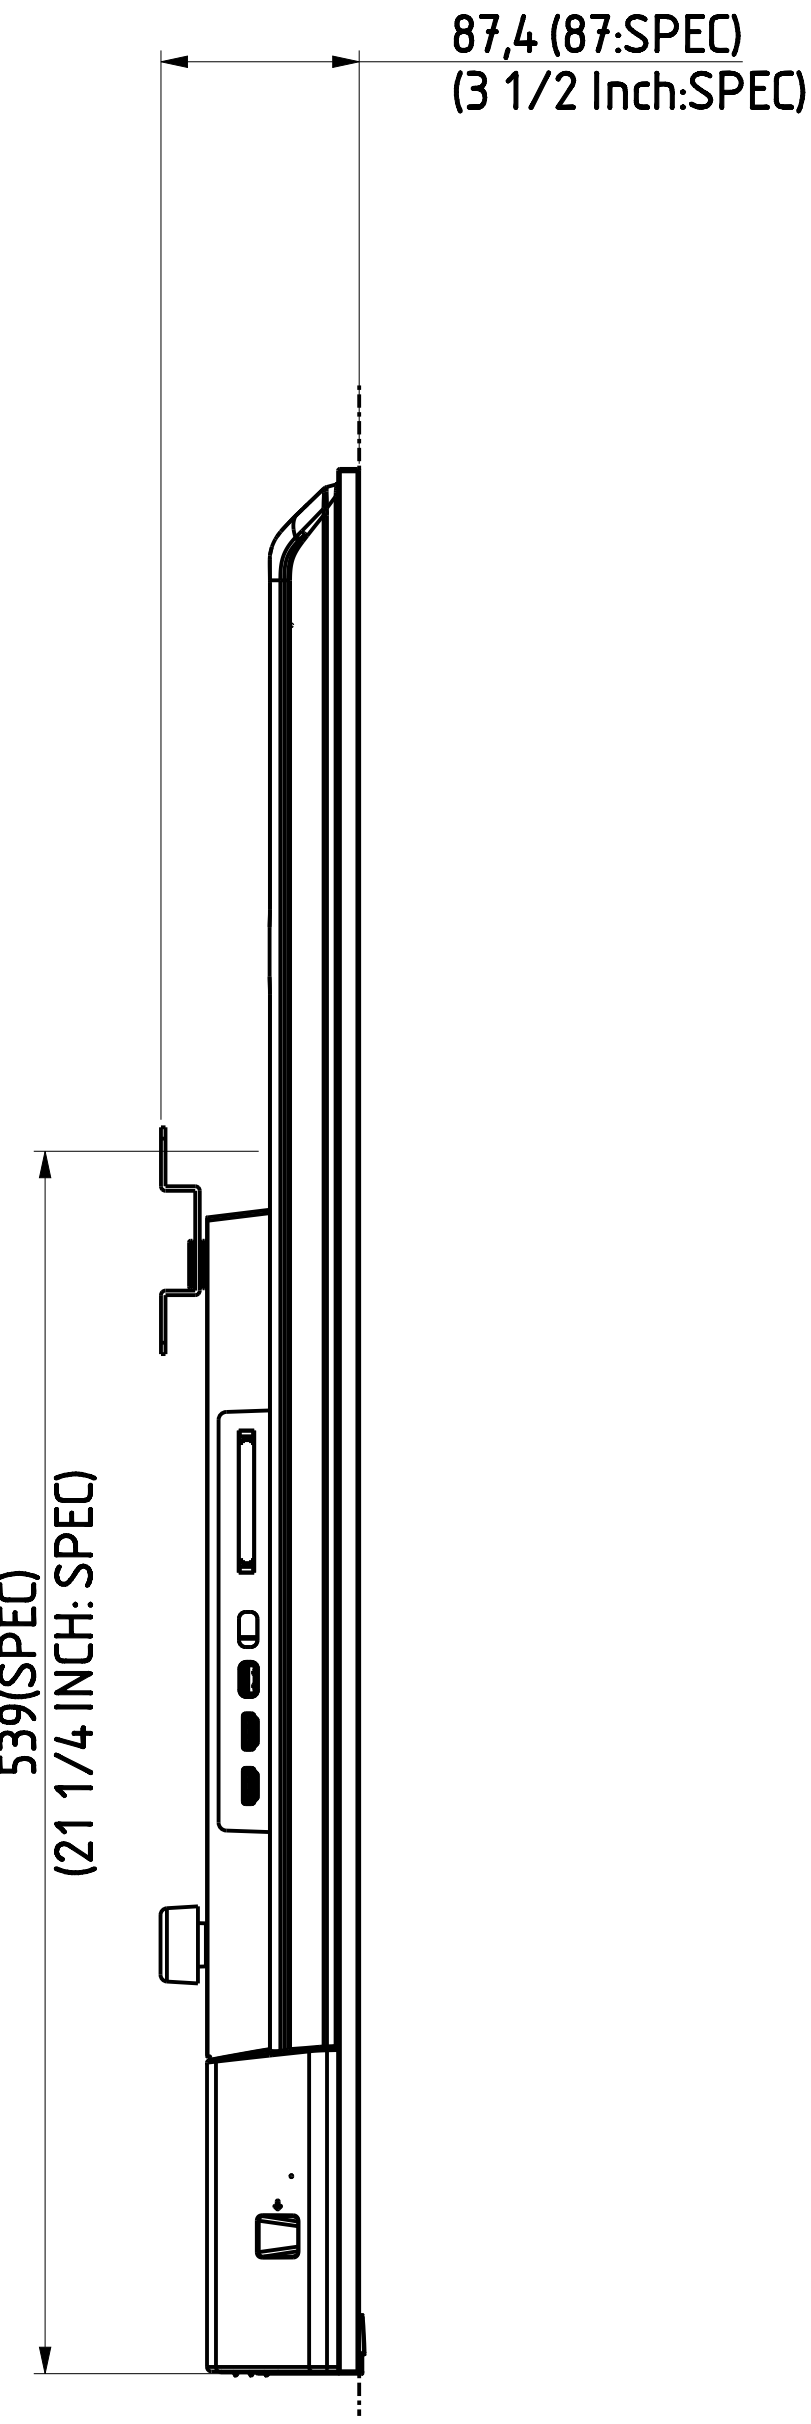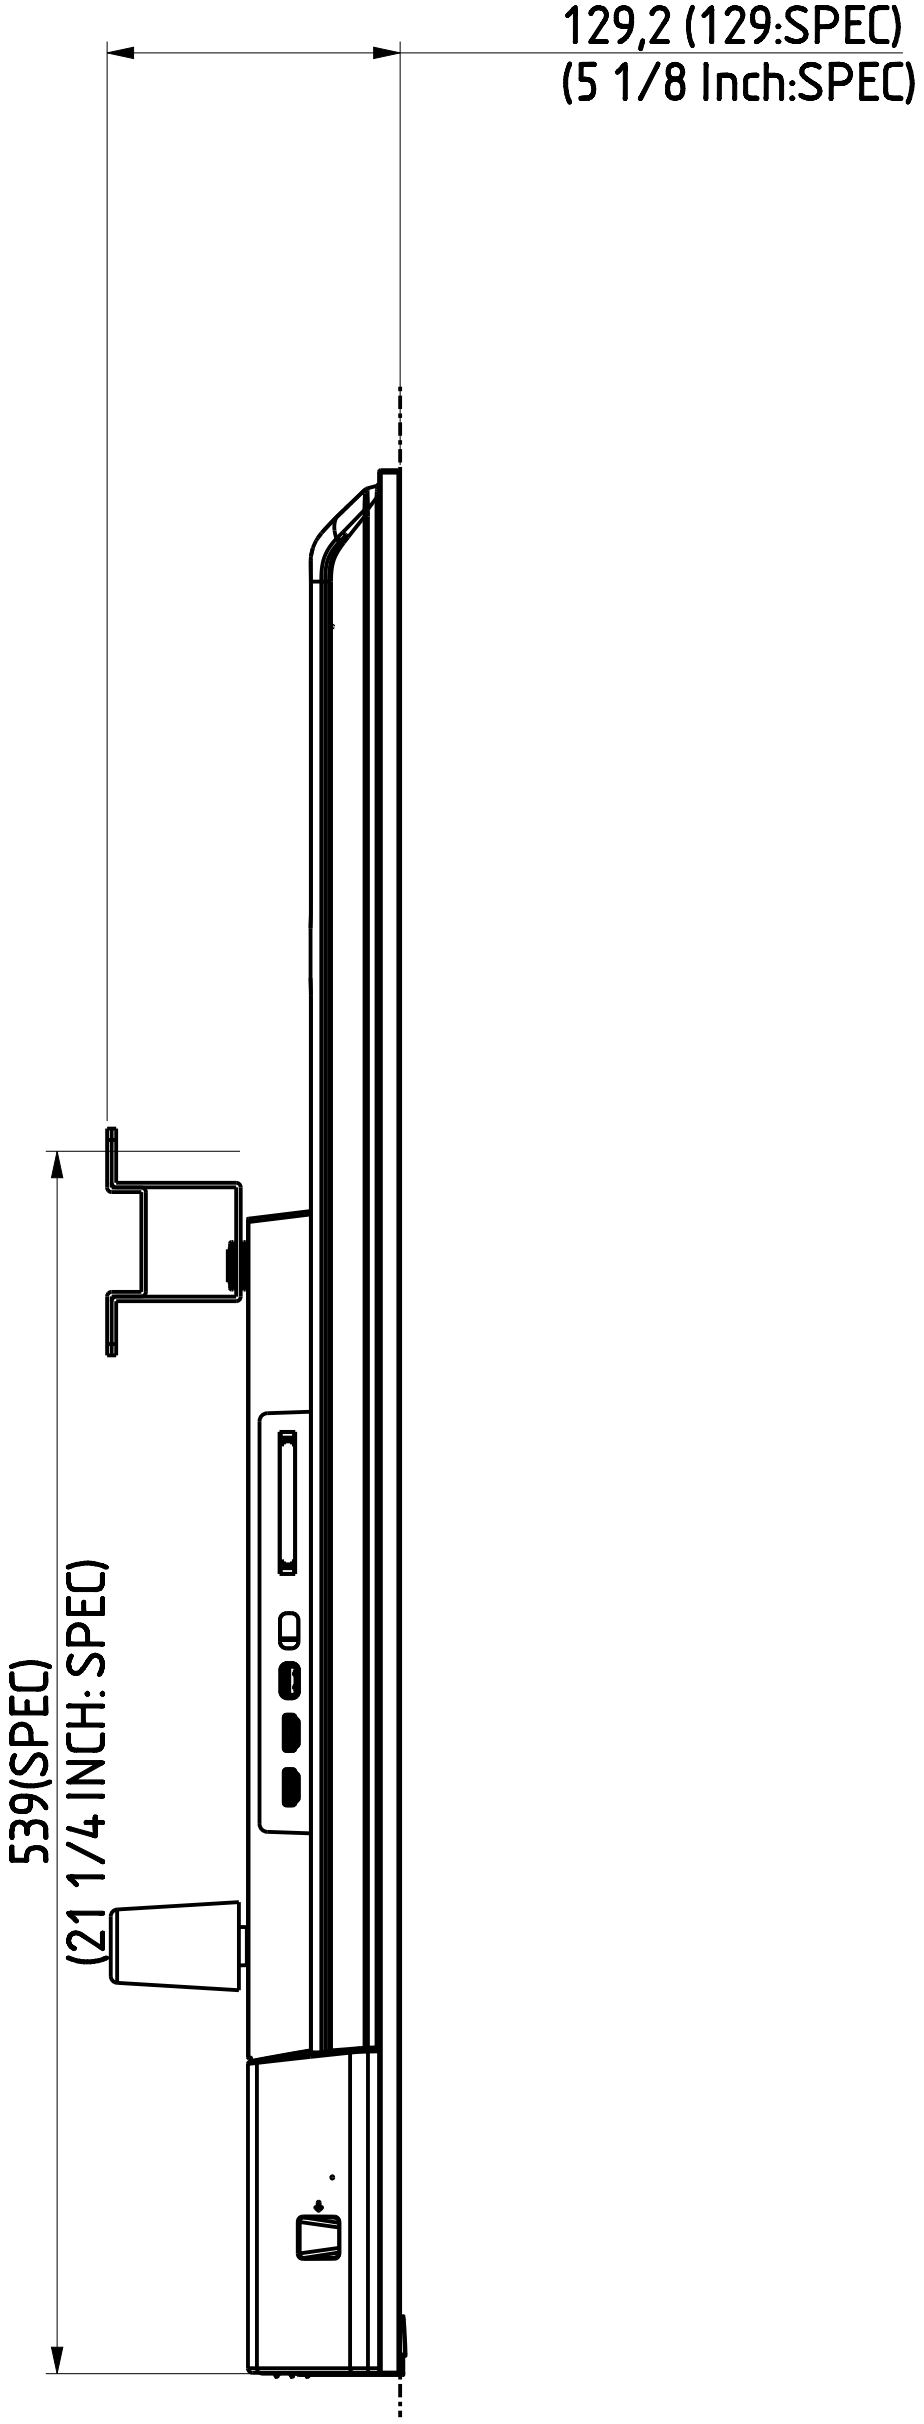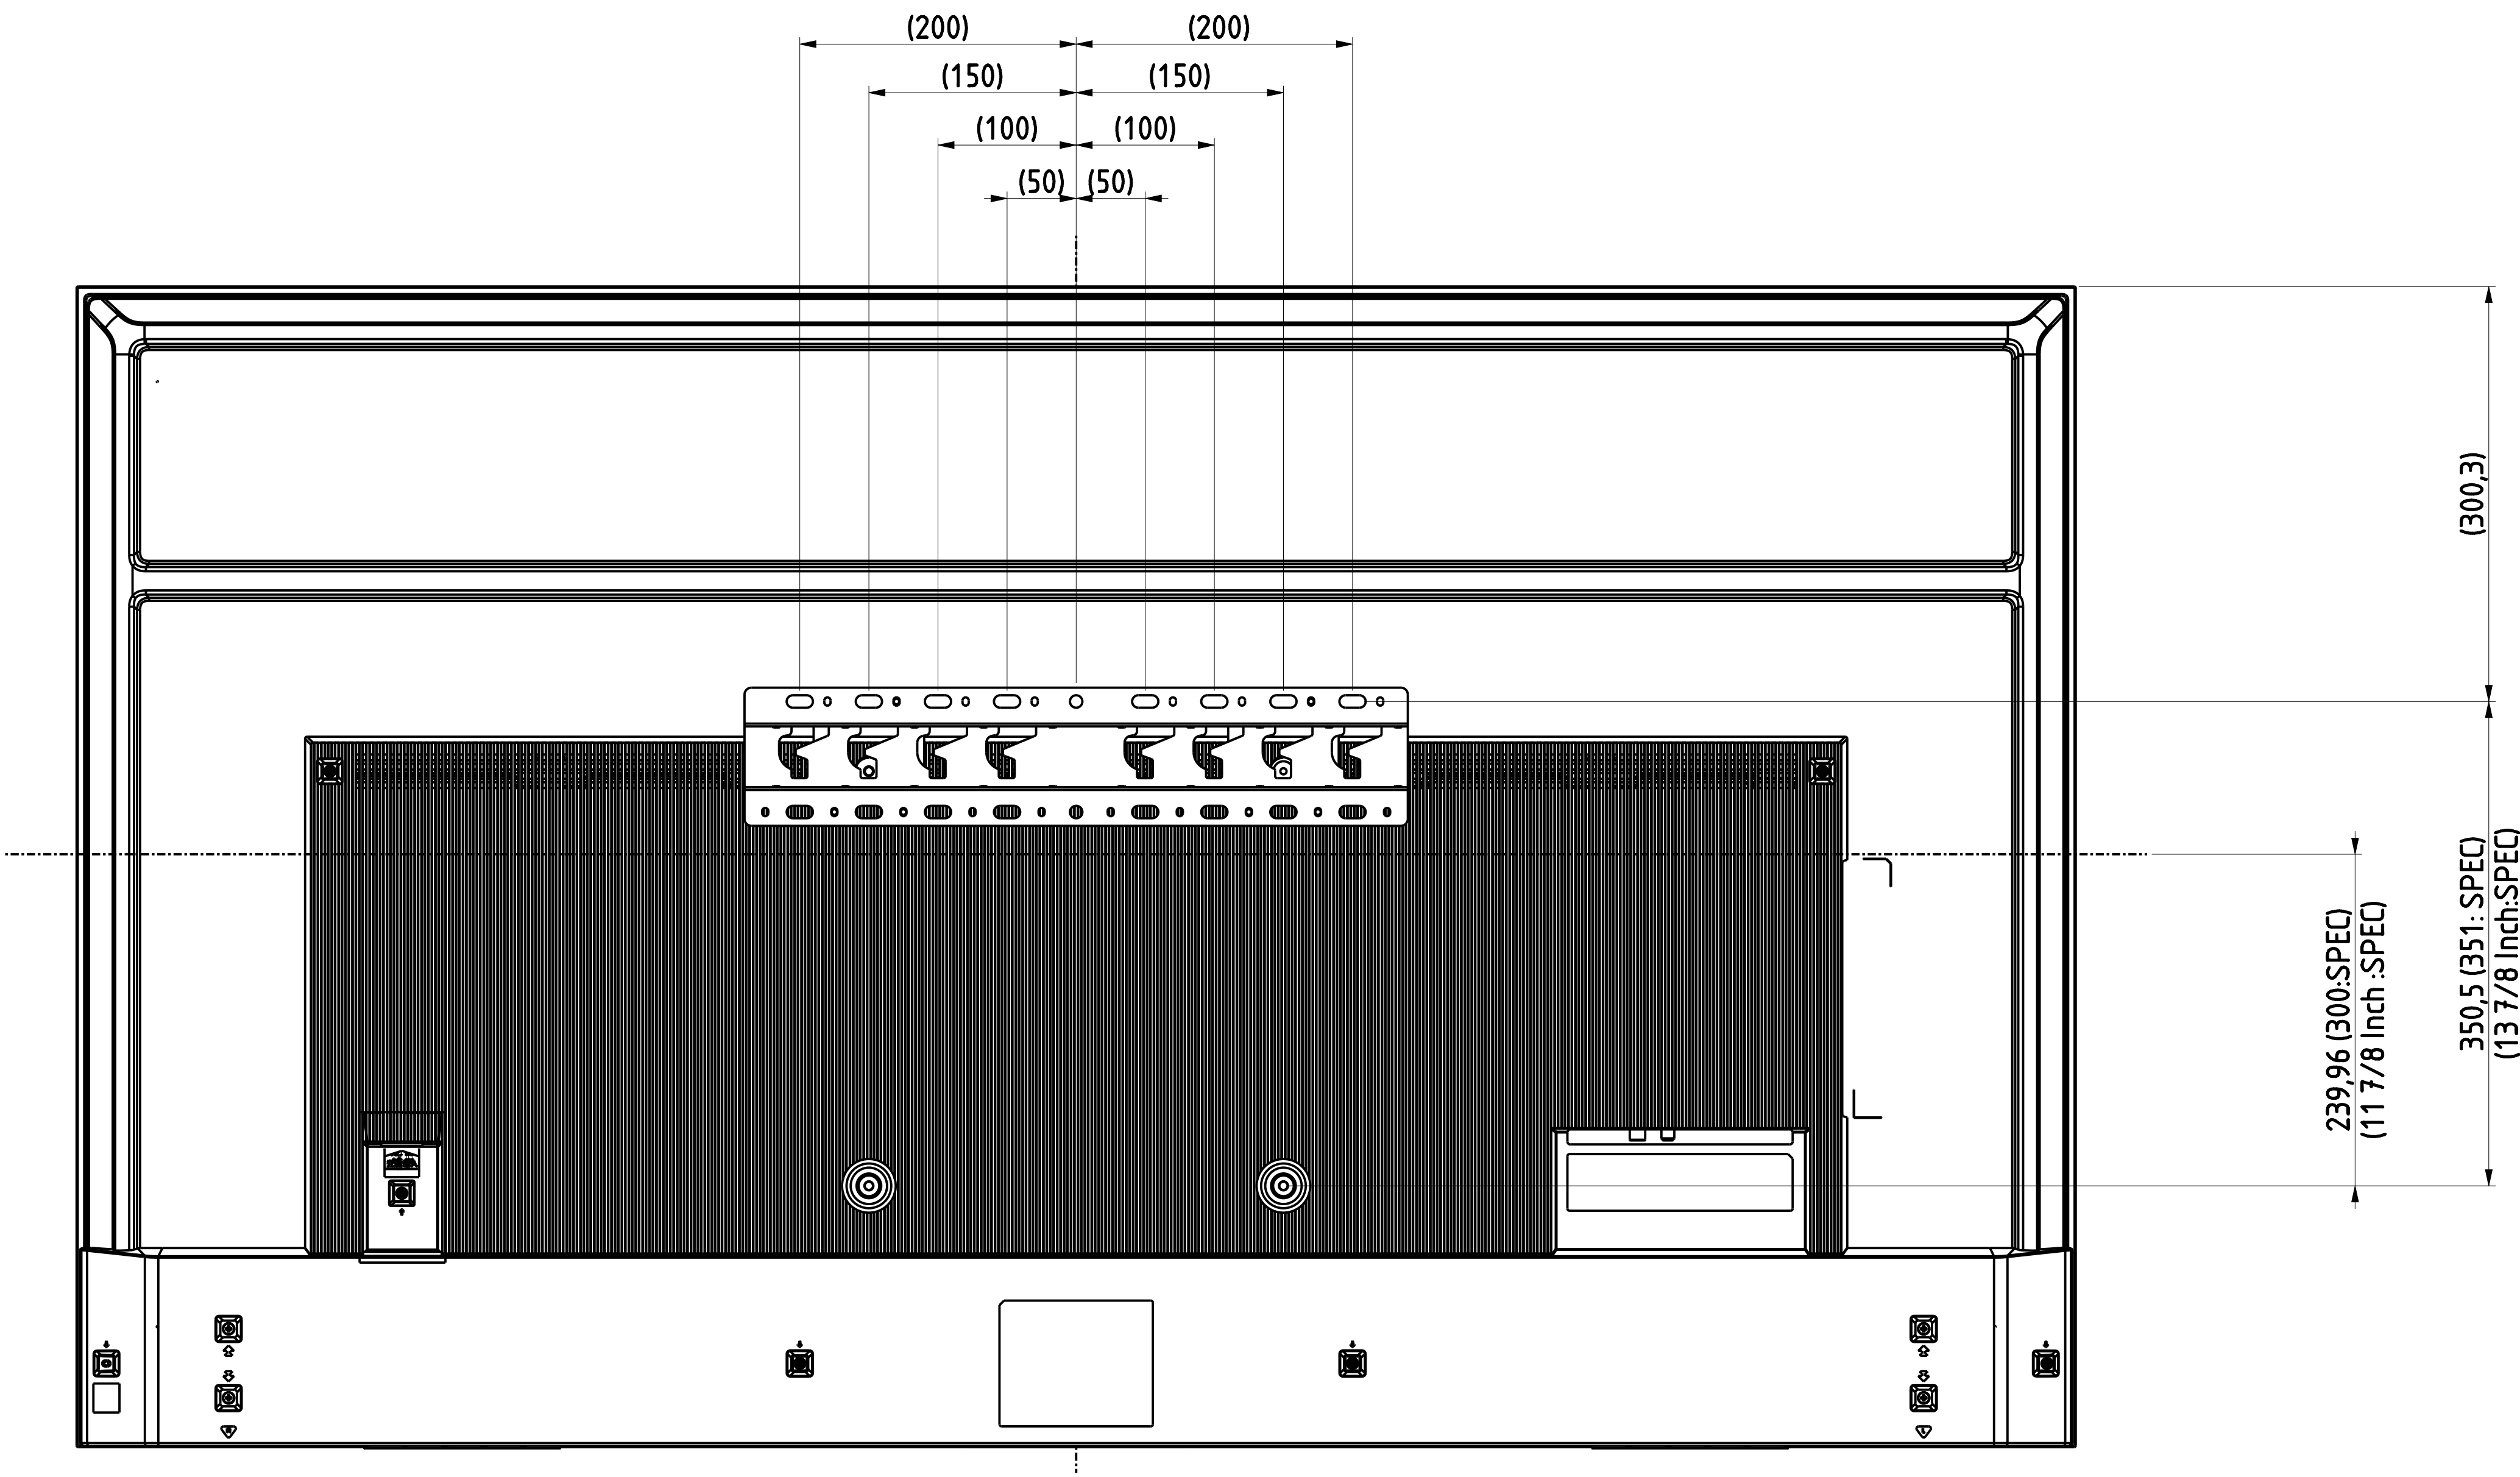

				MODEL:		PROE 3D: ID25_650_SONY1		PROE 2D: 00_SNY_65_6V_250825			
TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)				mm		TOLERANCES UNLESS OTHERWISE STATED DIMENSIONS & ANGLE					
RANGE OF DIM.		METAL & PLASTIC								POLYFOAM	
0 ~ 30		±0.10		+0/-2.0		+2.0/-0				0,300	
30 ~ 60		±0.15									
60 ~ 120		±0.20									
120 ~ 300		±0.25									
300 ~ 600		±0.30									
600 ~ 1200		±0.40		+0/-3.0		6V Drawing					
1200 ~ UPON		±0.50		+0/-4.0							
ANGLE (SHEET METAL)				± 0.5°		Aug-25-25				Technology Ltd.	
Internal Diameter of Plastic Screw Boss				± 0.05							

REVISION LIST							
ITEM	ECN NO.	POSITION	DESCRIPTION		DATE	UPDATED BY	APPROVED BY
			WAS	IS			

SU-WL900

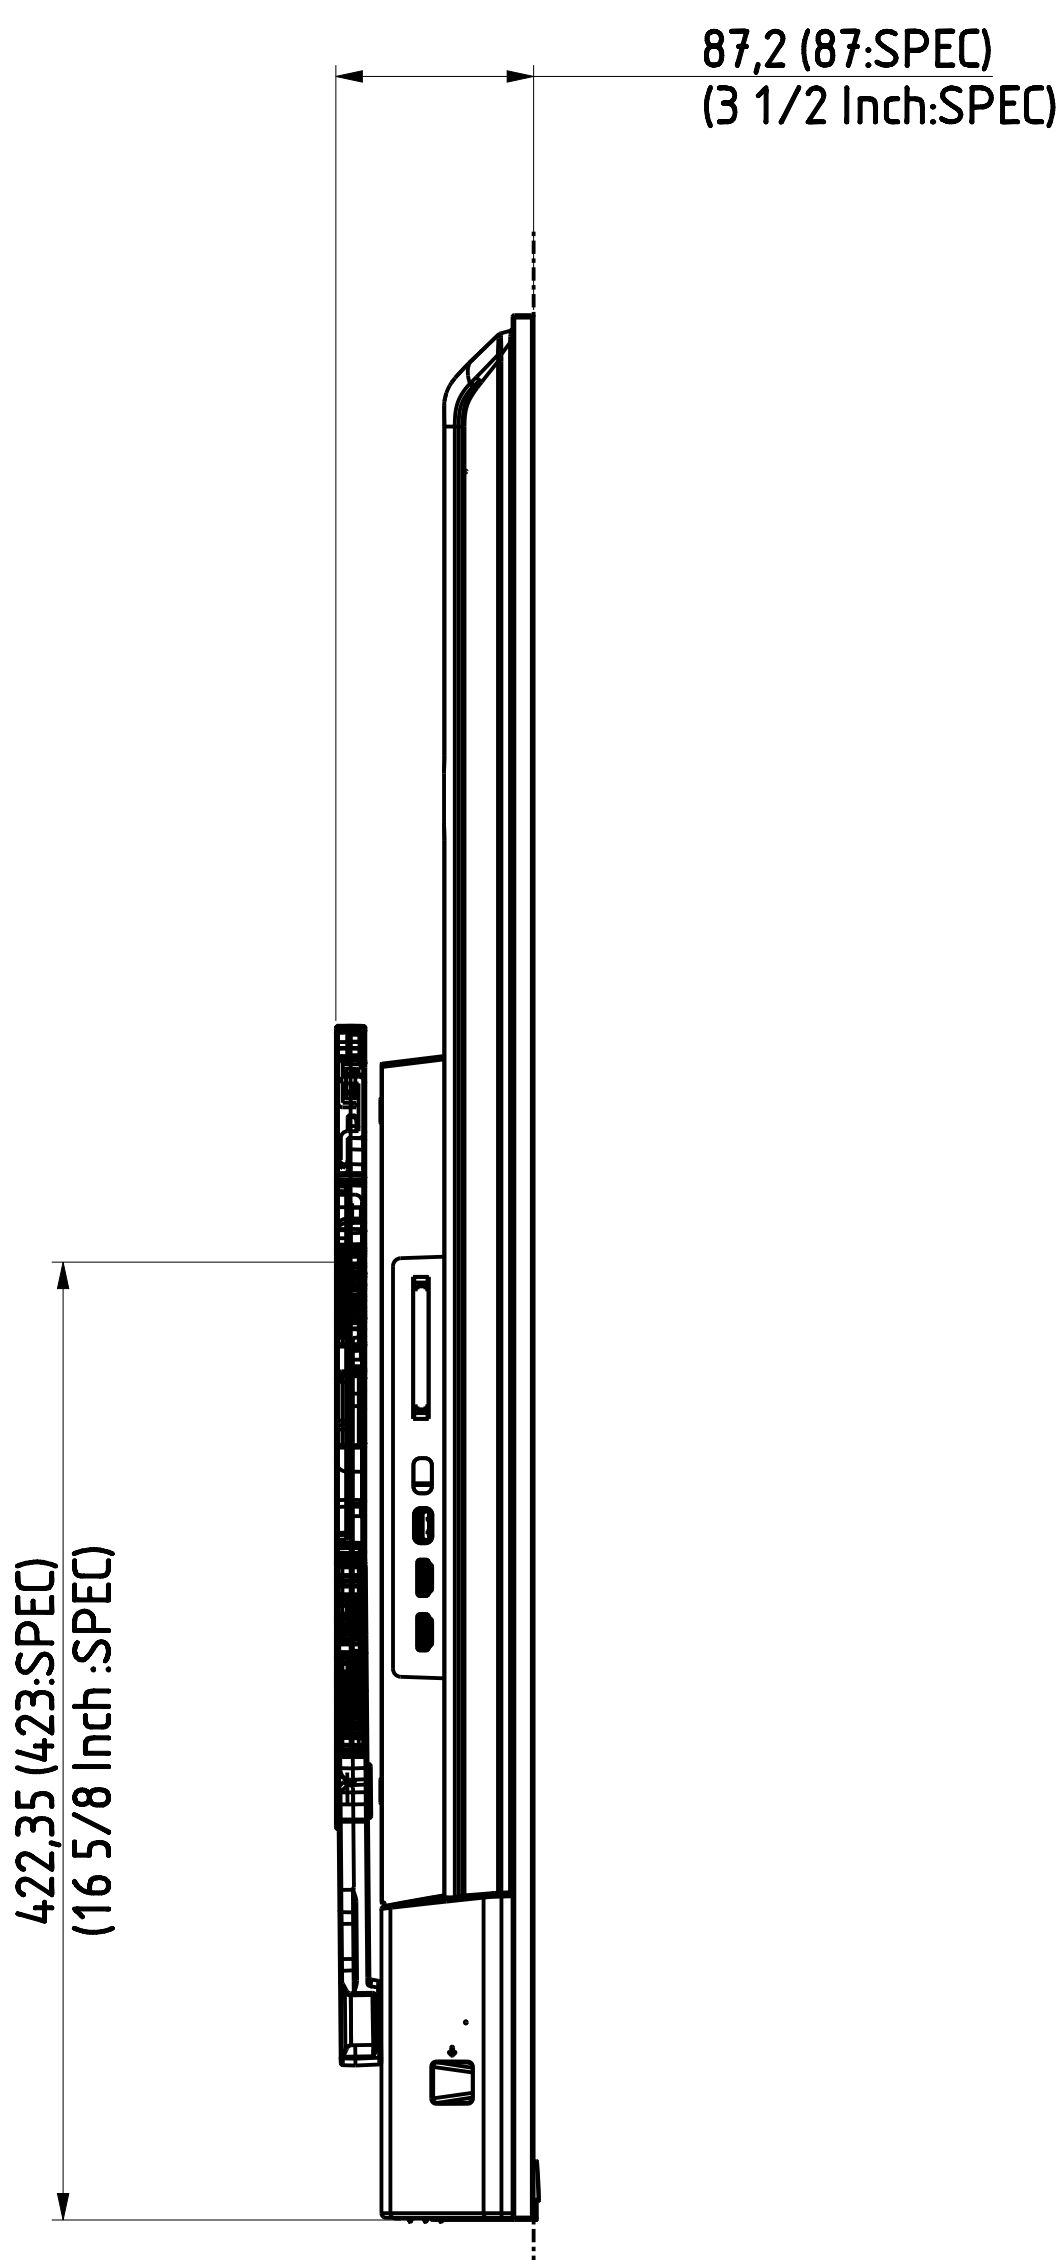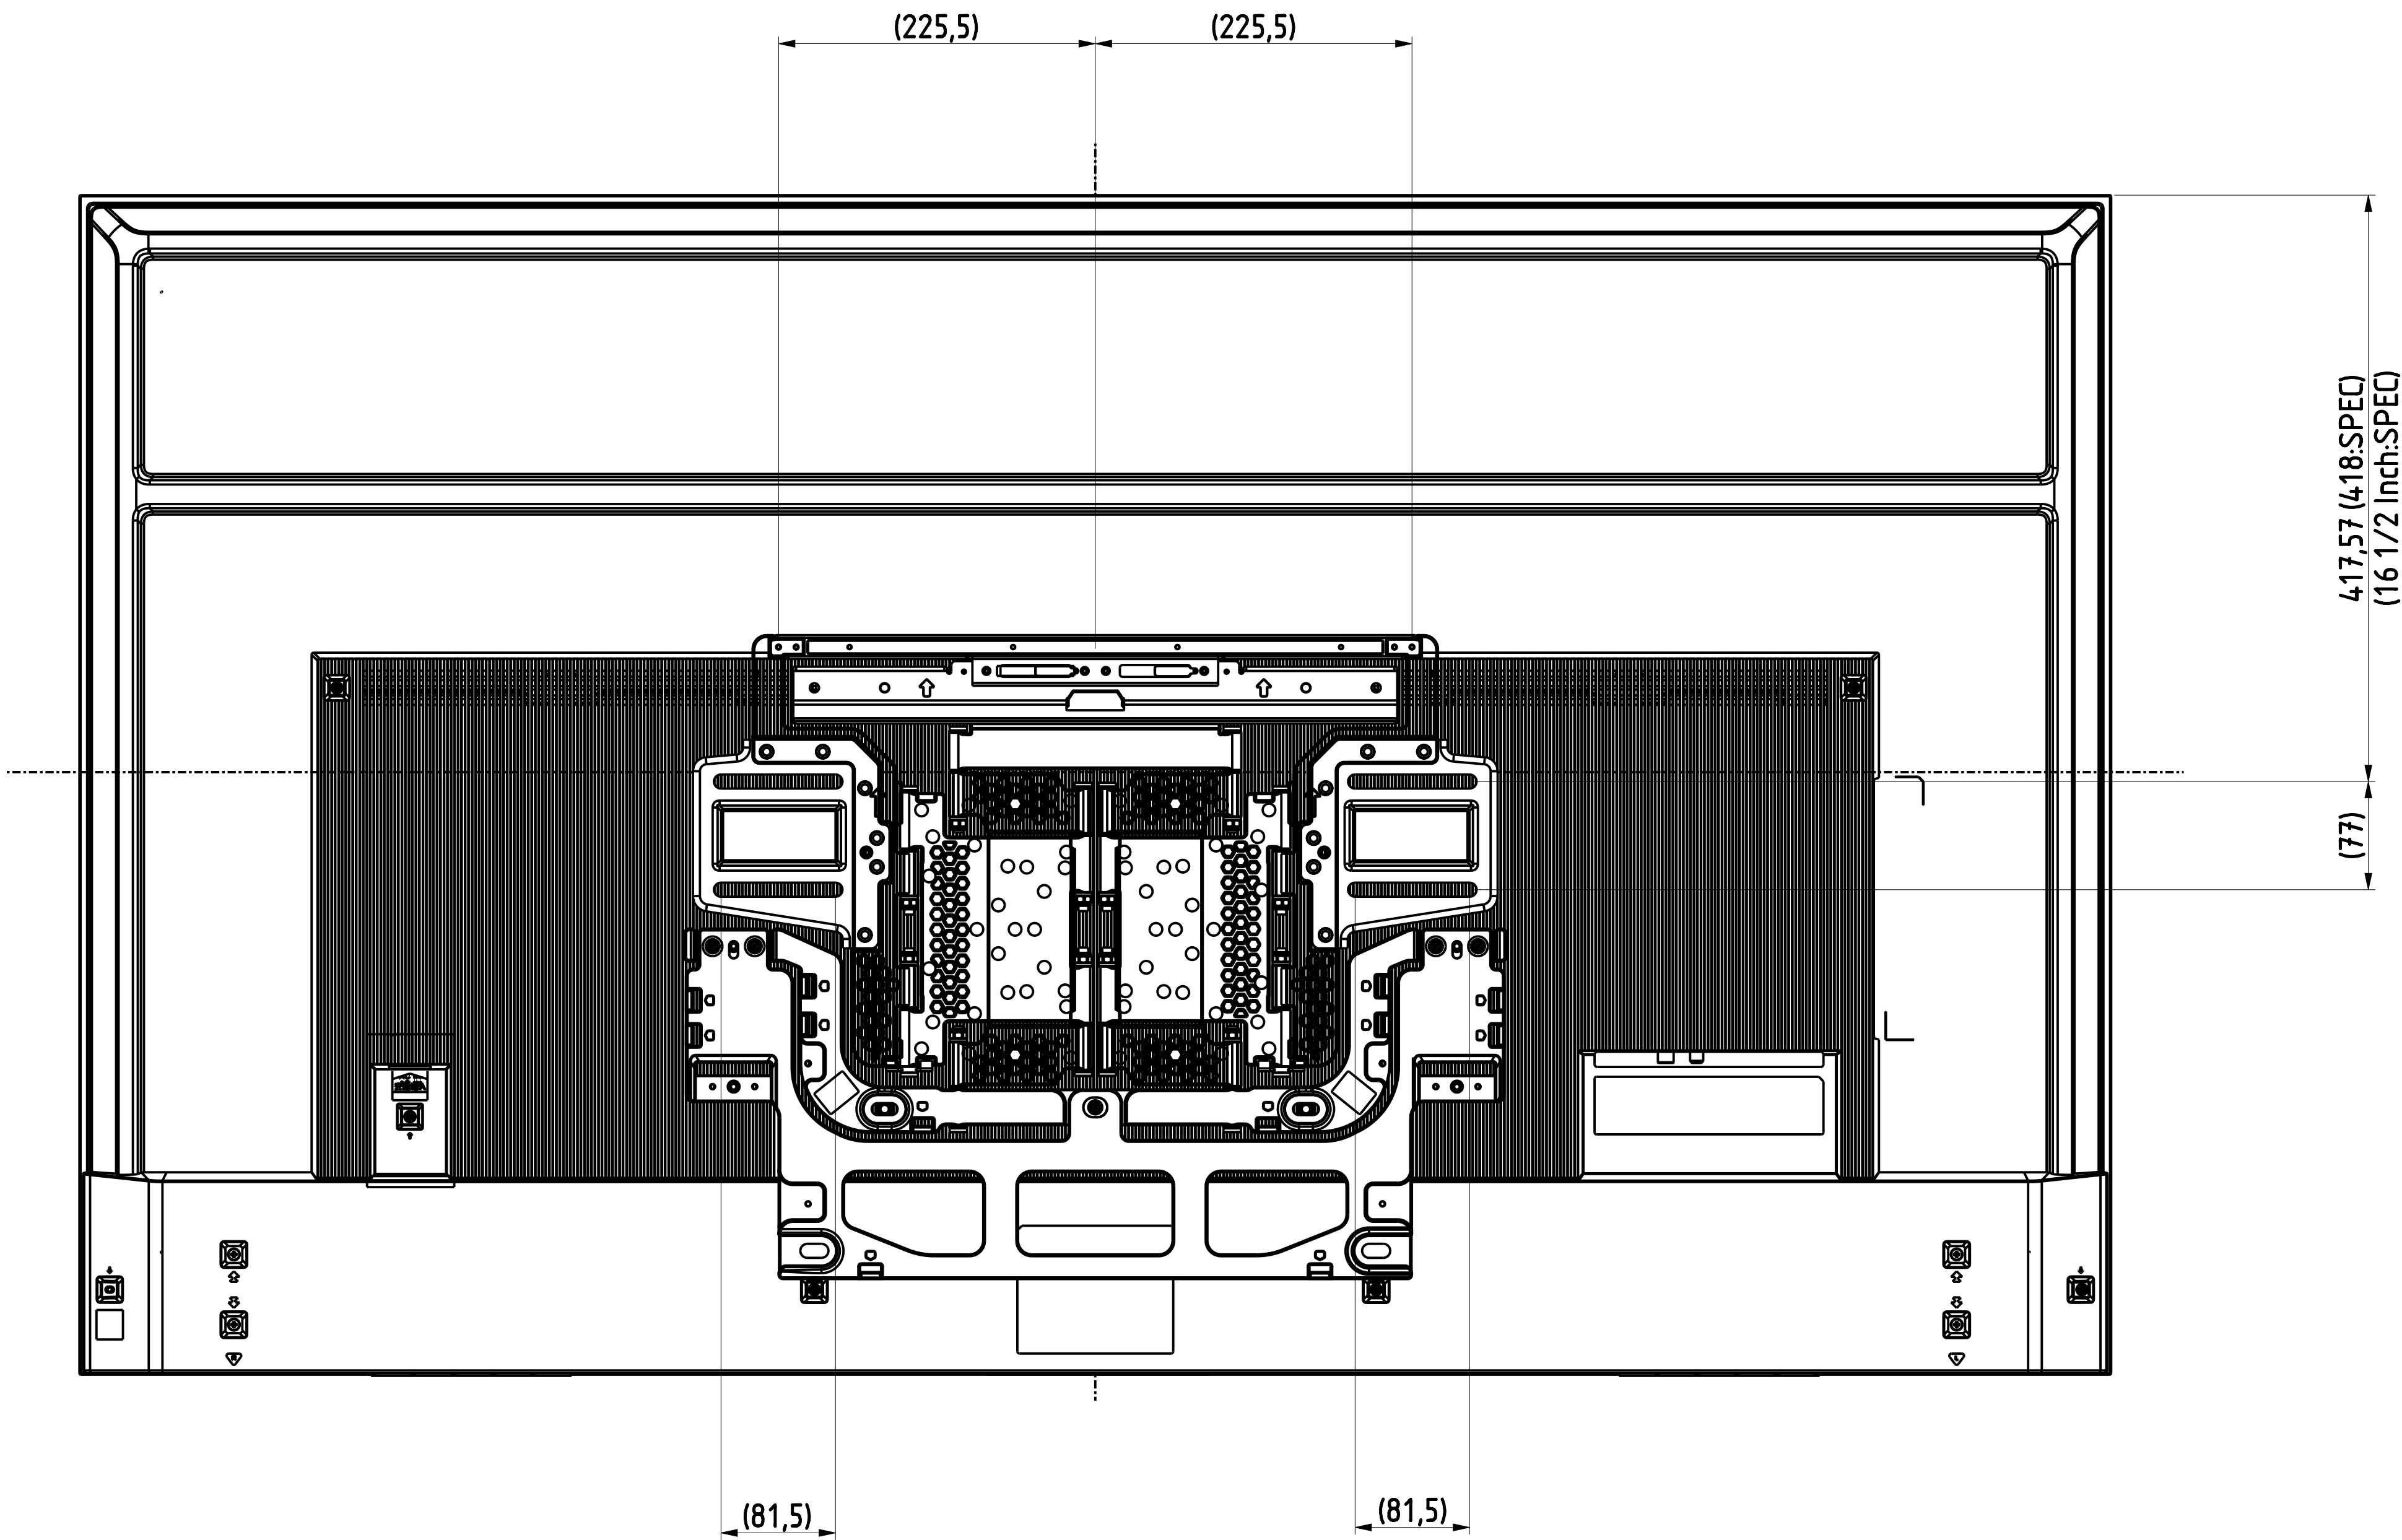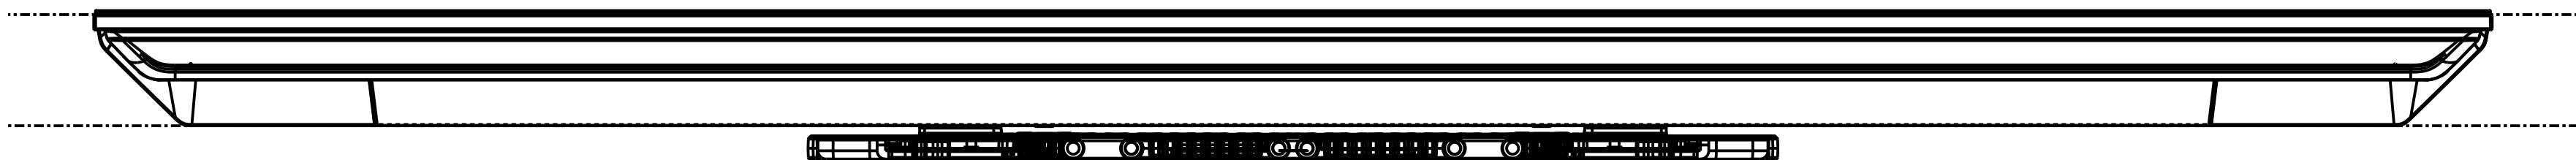

				MODEL:		PROE 3D: 1D25_650_SONY1		PROE 2D: 00_SNY_65_6V_250825	
TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)				TOLERANCES UNLESS OTHERWISE STATED					
RANGE OF DIM.		METAL & PLASTIC		POLYFOAM		CARTON			
0 ~ 30		±0.10							
30 ~ 60		±0.15							
60 ~ 120		±0.20		+0/-2.0					
120 ~ 300		±0.25							
300 ~ 600		±0.30							
600 ~ 1200		±0.40		+0/-3.0					
1200 ~ UPON		±0.50		+0/-4.0					
ANGLE (SHEET METAL)				± 0.5°					
Internal Diameter of Plastic Screw Boss				± 0.05					
						Aug-25-25			
								6-6 1/2	
								TP	
								Technology Ltd.	